

RJ45S END VIEW

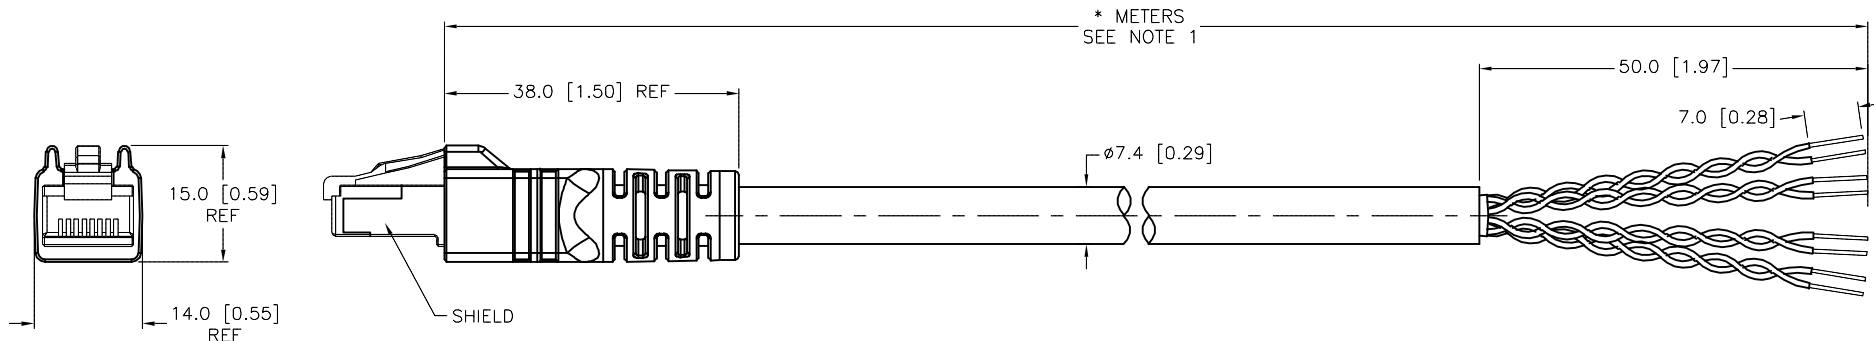


12345678

- 1 = WHITE/ORANGE
- 2 = ORANGE
- 3 = WHITE/GREEN
- 4 = BLUE
- 5 = WHITE/BLUE
- 6 = GREEN
- 7 = WHITE/BROWN
- 8 = BROWN

SPECIFICATIONS

CONTACT CARRIER MATERIAL	POLYCARBONATE
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
CONTACT MATERIAL/PLATING	BRONZE/GOLD
RATED CURRENT [A]	1.5 A
RATED VOLTAGE [V]	42 V
OUTER CABLE JACKET MATERIAL/COLOR	TPE/TEAL
CONDUCTOR INSULATION MATERIAL	HDPE
NUMBER OF CONDUCTORS [AWG]	4UTPx26 AWG, STRANDED CAT 6A
SHIELDING	ALUM.-POLYESTER FOIL & TINNED-COPPER BRAIDED
TEMPERATURE RANGE	-40°C to +75°C (-40°F to +167°F)
PROTECTION CLASS	MEETS IEC IP20






CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	 <div>3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us</div>					
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT	NF	DATE	03/27/20	DESCRIPTION	RJ45S 860-*M	
APVD			L.S.	SCALE	1=1.0				
FINISH			CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT				IDENTIFICATION NO.	REV
				MILLIMETER [INCH]					
			DO NOT SCALE THIS DRAWING				FILE: 777044197	SHEET 1 OF 1	

A	DRAWING RELEASE	NF	04/09/20	
REV	DESCRIPTION	BY	DATE	ECO. NO.