

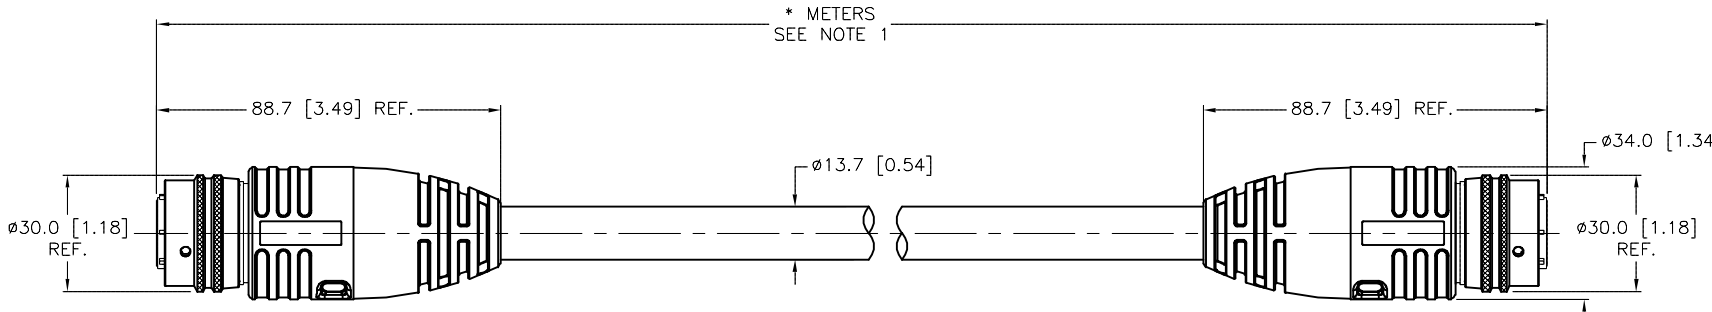





FEMALE END VIEW		MALE END VIEW		SPECIFICATIONS	
				CONTACT CARRIER MATERIAL	NEOPRENE
A = VIOLET B = RED C = GRAY D = RED/BLUE E = GREEN F = BLUE G = GRAY/PINK H = WHITE/GREEN J = WHITE/YELLOW K = WHITE/GRAY L = BLACK M = GREEN/YELLOW N = YELLOW/BROWN P = BROWN/GREEN R = WHITE S = YELLOW T = PINK U = GRAY/BROWN V = BROWN		A = VIOLET B = RED C = GRAY D = RED/BLUE E = GREEN F = BLUE G = GRAY/PINK H = WHITE/GREEN J = WHITE/YELLOW K = WHITE/GRAY L = BLACK M = GREEN/YELLOW N = YELLOW/BROWN P = BROWN/GREEN R = WHITE S = YELLOW T = PINK U = GRAY/BROWN V = BROWN		MOLDED HEAD MATERIAL/COLOR	PVC/BLACK
CONNECTOR TYPE/STYLE - MS 3116M SHELL SIZE - 14 INSERT ARRANGEMENT - 19S		CONNECTOR TYPE/STYLE - MS 3116M SHELL SIZE - 14 INSERT ARRANGEMENT - 19P		CONTACT MATERIAL/PLATING	COPPER ALLOY/GOLD
				COUPLING NUT MATERIAL/PLATING	ALUMINUM ALLOY/OLIVE DRAB CHROMATE
				MOLD SLEEVE	ALUMINUM/BLACK ANODIZED
				RATED CURRENT [A]	5.5 A
				RATED VOLTAGE [V]	600 V
				OUTER JACKET MATERIAL/COLOR	TPE/BLACK
				CONDUCTOR INSULATION MATERIAL	POLYESTER ELASTOMER
				NUMBER OF CONDUCTORS	20x18 AWG
				TEMPERATURE RATING	-40°C TO +105°C (-40°F TO +221°F)
				PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67, IP68
				CONNECTOR TYPE	MIL-DTL-26482

																																				
<table><tr><th>CABLE LENGTH</th><th>TOLERANCE*</th></tr><tr><td>ALL LENGTHS</td><td>+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER</td></tr><tr><th>STRIP LENGTH</th><th>TOLERANCE*</th></tr><tr><td>0-7mm</td><td>±0.5mm</td></tr><tr><td>8-29mm</td><td>±1.0mm</td></tr><tr><td>30-49mm</td><td>±2.0mm</td></tr><tr><td>50-69mm</td><td>±3.0mm</td></tr><tr><td>70-100mm</td><td>±4.0mm</td></tr><tr><td>OVER 100mm</td><td>±5.0mm</td></tr></table> * UNLESS OTHERWISE SPECIFIED	CABLE LENGTH	TOLERANCE*	ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER	STRIP LENGTH	TOLERANCE*	0-7mm	±0.5mm	8-29mm	±1.0mm	30-49mm	±2.0mm	50-69mm	±3.0mm	70-100mm	±4.0mm	OVER 100mm	±5.0mm																		
CABLE LENGTH	TOLERANCE*																																			
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER																																			
STRIP LENGTH	TOLERANCE*																																			
0-7mm	±0.5mm																																			
8-29mm	±1.0mm																																			
30-49mm	±2.0mm																																			
50-69mm	±3.0mm																																			
70-100mm	±4.0mm																																			
OVER 100mm	±5.0mm																																			
NOTES: 1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS. 2. "/S101" DESIGNATES FLEXLIFE-20 AND CTRACK CABLE. 3. "/S1366" DESIGNATES OVERMOLDED MIL-SPEC CONNECTOR MOLDED IN LARGER BODY SIZE TO ACCOMMODATE LARGE CABLE DIAMETER. 4. UNUSED CONDUCTORS TRIMMED BACK TO CABLE JACKET ON BOTH ENDS.																																				
SOURCE DRAWING - FOR REFERENCE ONLY																																				
<table><tr><td>RELATED DOCUMENTS</td><td>3RD ANGLE PROJECTION</td><td colspan="2">THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.</td><td colspan="2">3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us</td></tr><tr><td>1.</td><td rowspan="2"></td><td rowspan="2">DRFT NF</td><td rowspan="2">DATE 05/08/20</td><td colspan="2" rowspan="2">DESCRIPTION MS 3116M-14-19S-2066-*--14-19P/S101/S1366</td></tr><tr><td>2.</td></tr><tr><td>3.</td><td rowspan="2">ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY</td><td rowspan="2">APVD E.S.</td><td rowspan="2">SCALE 1=2.0</td><td colspan="2" rowspan="2">IDENTIFICATION NO.</td></tr><tr><td>4.</td></tr><tr><td>MATERIAL</td><td rowspan="2">SEE SPECIFICATIONS</td><td colspan="2">UNIT OF MEASUREMENT</td><td colspan="2" rowspan="2">REV A</td></tr><tr><td>FINISH</td><td colspan="2">MILLIMETER [INCH]</td></tr><tr><td colspan="2"></td><td colspan="2">DO NOT SCALE THIS DRAWING</td><td colspan="2">FILE: 777044429</td></tr></table>		RELATED DOCUMENTS	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us		1.		DRFT NF	DATE 05/08/20	DESCRIPTION MS 3116M-14-19S-2066-*--14-19P/S101/S1366		2.	3.	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	APVD E.S.	SCALE 1=2.0	IDENTIFICATION NO.		4.	MATERIAL	SEE SPECIFICATIONS	UNIT OF MEASUREMENT		REV A		FINISH	MILLIMETER [INCH]				DO NOT SCALE THIS DRAWING		FILE: 777044429	
RELATED DOCUMENTS	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us																																
1.		DRFT NF	DATE 05/08/20	DESCRIPTION MS 3116M-14-19S-2066-*--14-19P/S101/S1366																																
2.																																				
3.	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	APVD E.S.	SCALE 1=2.0	IDENTIFICATION NO.																																
4.																																				
MATERIAL	SEE SPECIFICATIONS	UNIT OF MEASUREMENT		REV A																																
FINISH		MILLIMETER [INCH]																																		
		DO NOT SCALE THIS DRAWING		FILE: 777044429																																
A	DRAWING RELEASE	NF	05/11/20																																	
REV	DESCRIPTION	BY	DATE	ECO NO.																																