



MALE END VIEW (P1)



1 = BLACK #1
2 = N/C
3 = BLACK #3
4 = N/C
5 = N/C
6 = N/C
7 = BLACK #2
8 = N/C
⊕ = GREEN/YELLOW

FOR ALL N/C, SEE NOTE 2


FEMALE END VIEW (J1)



1 = BLACK #1
2 = BLACK #2
3 = BLACK #3
4 = N/C
5 = N/C
6 = JUMPER TO 7
7 = JUMPER TO 8
8 = JUMPER TO 6
9 = N/C
10 = N/C
⓪ = GREEN/YELLOW


FOR ALL N/C, SEE NOTE 2

WIRING DIAGRAM

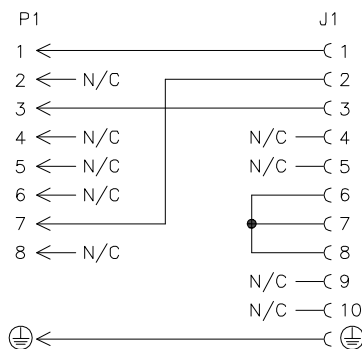

SPECIFICATIONS

OUTER CABLE JACKET MATERIAL/COLOR	PVC/BLACK
CONDUCTOR INSULATION MATERIAL	PVC/NYLON (NYLON OVERCOAT)
NUMBER OF CONDUCTORS [AWG]	4x16 AWG
TEMPERATURE RANGE	-40°C to +90°C (-40°F to +194°F)

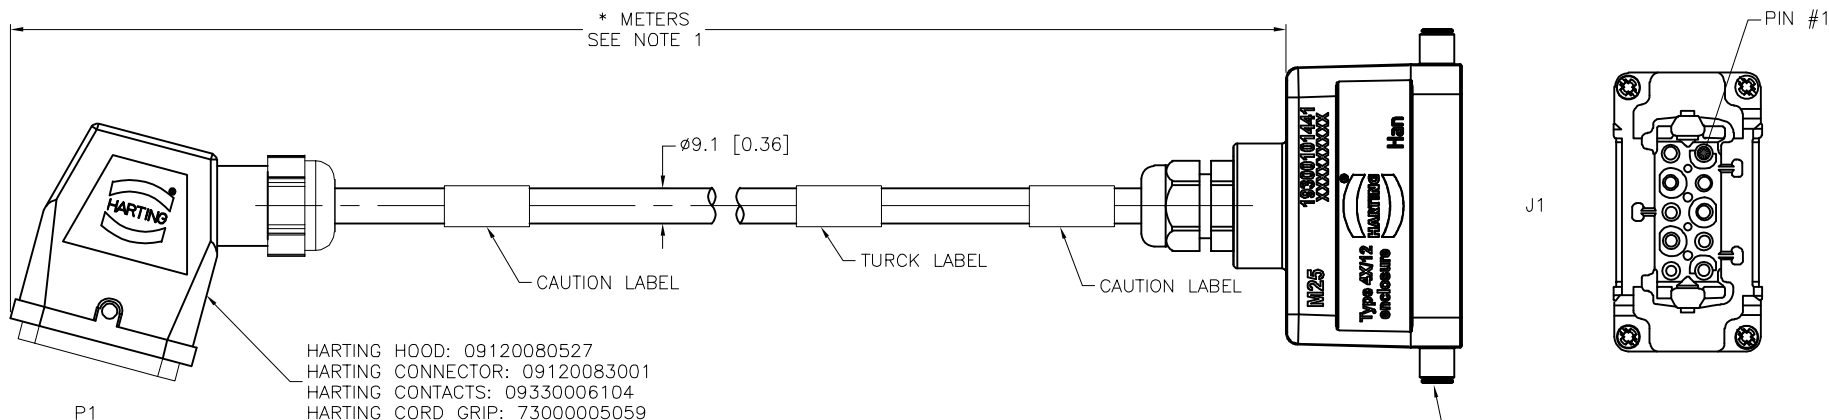

CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:


1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

2. INSERT CONTACTS IN ALL N/C POSITIONS.

CAUTION:

**⚠ RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD**

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED. TURCK		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us						
										
	MATERIAL			ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION	DRFT	ER	DATE	05/14/20		DESCRIPTION HANQWP8/OM-2538-*M-HANEM10F/J678
					APVD	D.L.	SCALE	1=2.0		
FINISH	UNIT OF MEASUREMENT MILLIMETER [INCH] DO NOT SCALE THIS DRAWING	IDENTIFICATION NO.				REV C				
		FILE: 777044471				SHEET 1 OF 1				