


MALE END VIEW (P1)




- 1 = BLACK #1
2 = N/C
3 = BLACK #3
4 = N/C
5 = N/C
6 = N/C
7 = BLACK #2
8 = N/C
⊕ = GREEN/YELLOW

••FOR ALL N/C, SEE NOTE 2••

SPECIFICATIONS

OUTER CABLE JACKET MATERIAL/COLOR	PVC/BLACK
CONDUCTOR INSULATION MATERIAL	PVC/NYLON (NYLON OVERCOAT)
NUMBER OF CONDUCTORS [AWG]	4x16 AWG
TEMPERATURE RANGE	-40°C to +90°C (-40°F to +194°F)

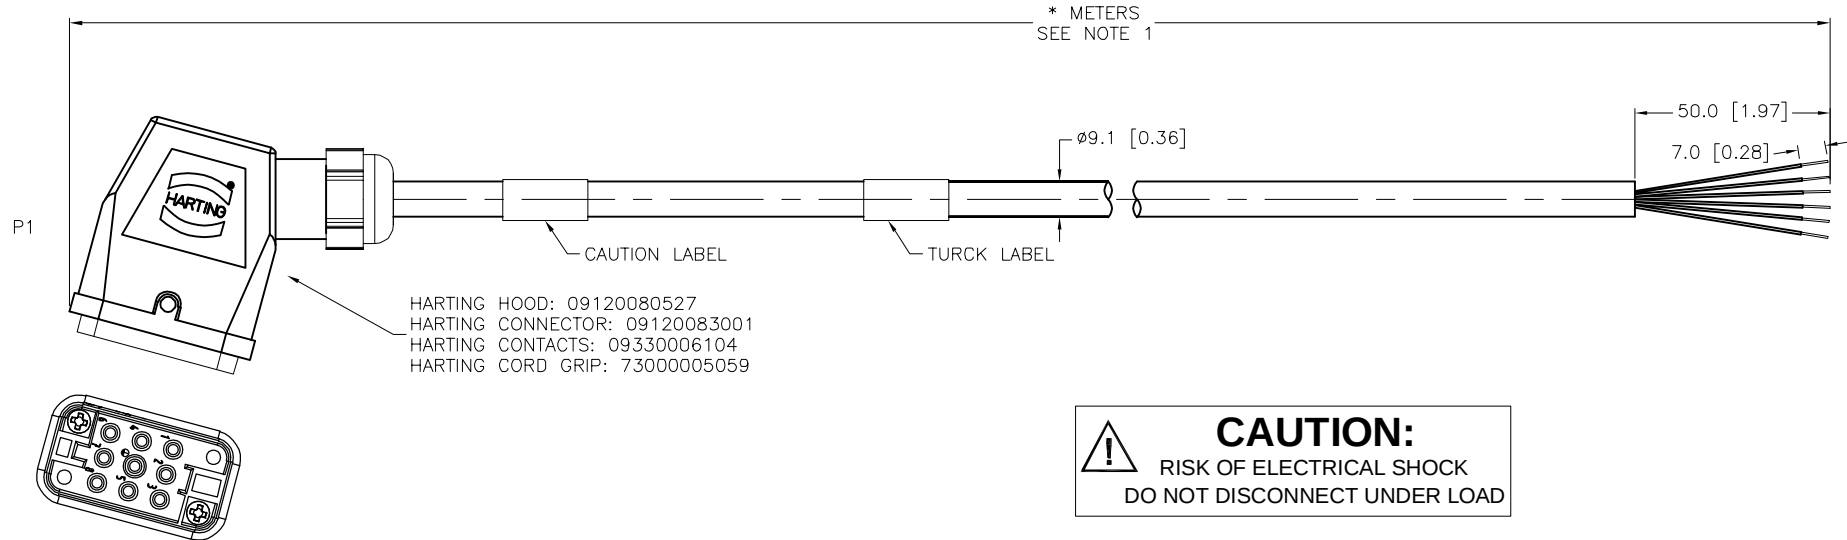

CAUTION:
RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD

CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

2. INSERT CONTACTS IN ALL N/C POSTIONS

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION 	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
		DRFT ER	DATE 05/26/20		
		APVD D.L.	SCALE 1=2.0	DESCRIPTION HANQWP8/OM-2538-*M	
		UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO.	REV C
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION	DO NOT SCALE THIS DRAWING		FILE: 777044517	SHEET 1 OF 1
FINISH					

C	UPDATED DRAWING	AS	08/20/24	500000010407
REV	DESCRIPTION	BY	DATE	ECO NO.