


MALE END VIEW




A = WHITE #1
B = WHITE #2
C = WHITE #3
D = WHITE #4
E = WHITE #5
F = YELLOW #6
G = YELLOW #7
H = YELLOW #8
J = YELLOW #9
K = YELLOW #10
L = PINK #11
M = PINK #12
N = PINK #13
P = PINK #14
R = PINK #15
S = ORANGE #16
T = ORANGE #17
U = ORANGE #18
V = ORANGE #19
W = ORANGE #20
X = BLUE #21
Y = BLUE #22
Z = BLUE #23
a = BLUE #24
b = BLUE #25
c = GREEN #26

CONNECTOR
TYPE/STYLE - MS 3118M
SHELL SIZE - 16
INSERT ARRANGEMENT - 26P

SPECIFICATIONS

CONTACT CARRIER MATERIAL	NEOPRENE
MOLDED HEAD MATERIAL/COLOR	PVC/BLACK
CONTACT MATERIAL/PLATING	COPPER ALLOY/GOLD
COUPLING NUT MATERIAL/PLATING	ALUMINUM ALLOY/OLIVE DRAB CHROMATE
MOLD SLEEVE	ALUMINUM/BLACK ANODIZED
RATED CURRENT [A]	2.0 A
RATED VOLTAGE [V]	600 V
OUTER JACKET MATERIAL/COLOR	TPE/BLACK
CONDUCTOR INSULATION MATERIAL	POLYESTER ELASTOMER
NUMBER OF CONDUCTORS	30x22 AWG
TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67,IP68
CONNECTOR TYPE	MIL-DTL-26482

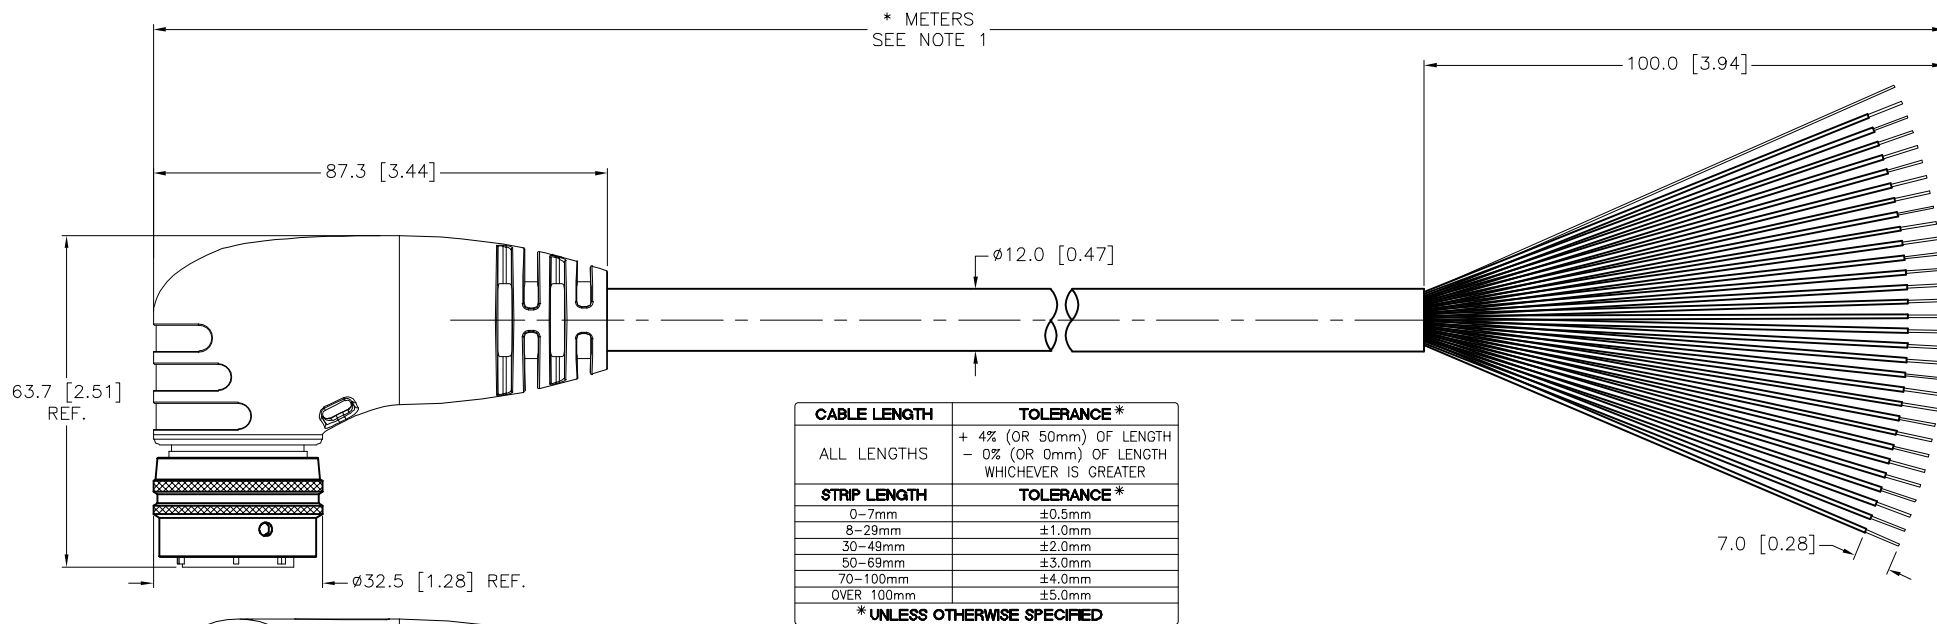

NOTES:

- "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTH.
- "/S101" DESIGNATES FLEXLIFE-20 AND CTRACK CABLE.
- UNUSED CONDUCTORS ARE TRIMMED BACK TO CABLE JACKET ON BOTH ENDS.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED. TURCK 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us			
1. 2. 3. 4.							
MATERIAL		DRFT	ER	DATE	06/23/20	DESCRIPTION	
SEE SPECIFICATIONS		APVD	J.H.	SCALE	1=1.5	MS 3118M-16-26P-2067-*/S101	
FINISH		UNIT OF MEASUREMENT MILLIMETER [INCH]				IDENTIFICATION NO.	
SEE SPECIFICATIONS						REV C	
		DO NOT SCALE THIS DRAWING				FILE: 777044564	
						SHEET 1 OF 1	