


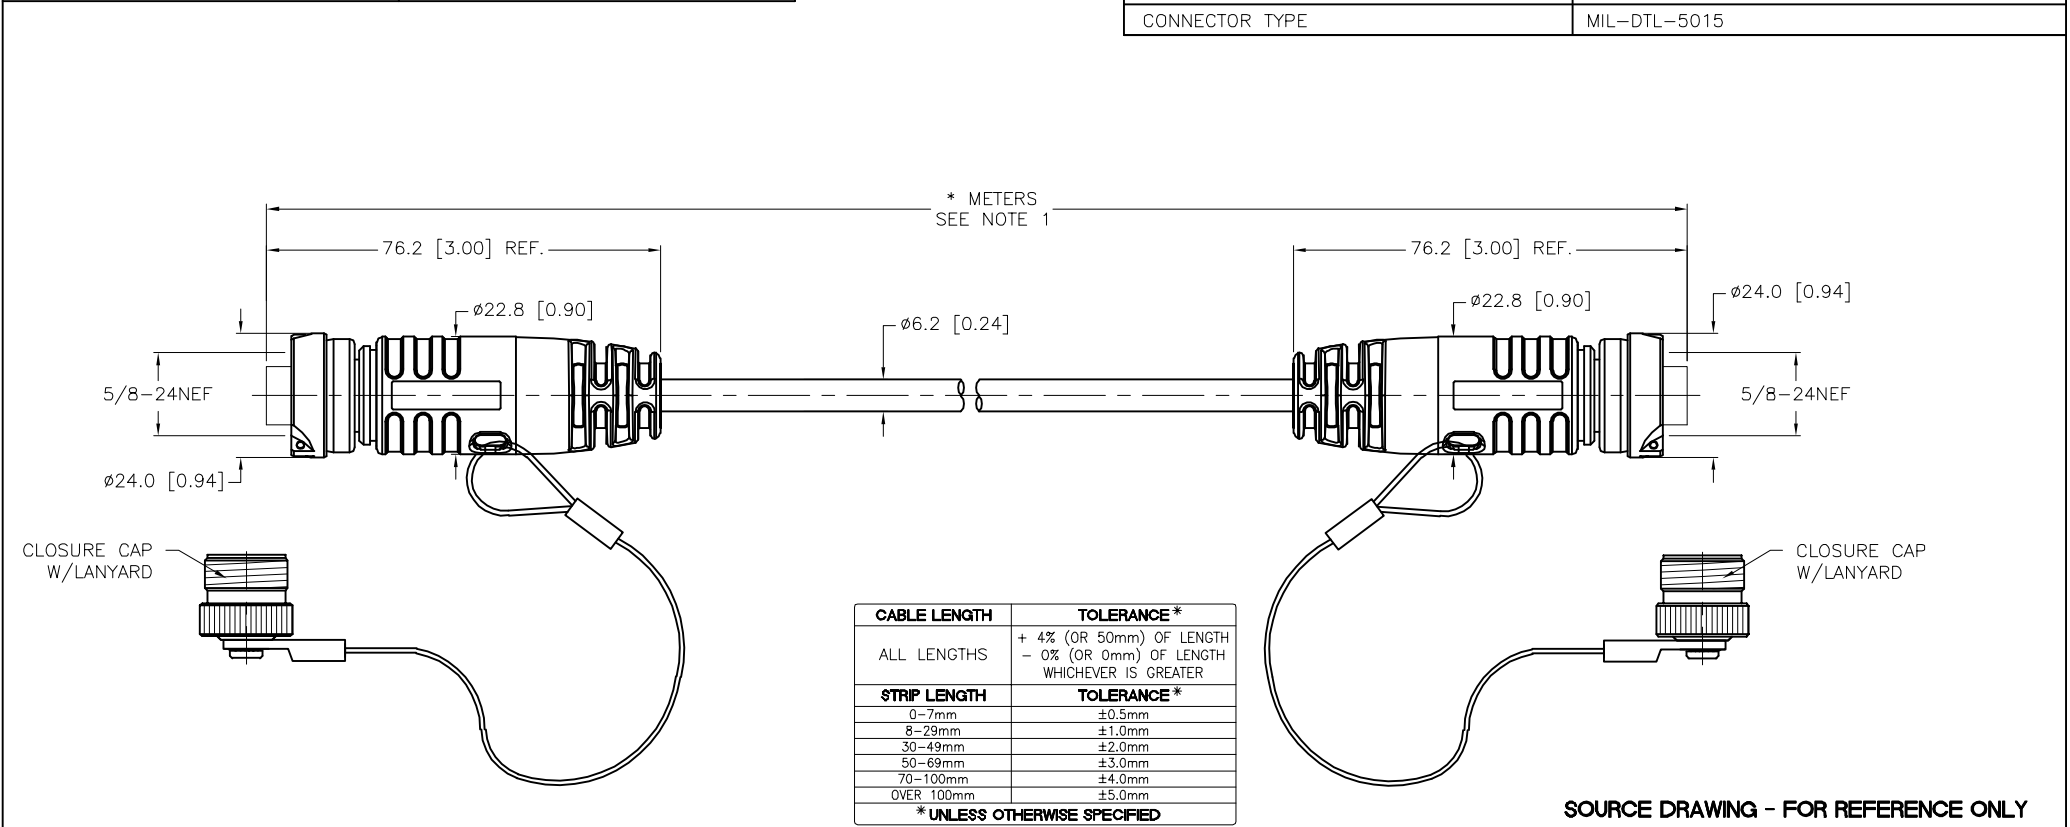


FEMALE END VIEW (J1)	MALE END VIEW (P1)	SPECIFICATIONS	
 A = BROWN B = BLUE	 A = BROWN B = BLUE	CONTACT CARRIER MATERIAL	NEOPRENE
		MOLDED HEAD MATERIAL/COLOR	PVC/BLACK
CONNECTOR TYPE/STYLE – MS 3106M SHELL SIZE – 10SL INSERT ARRANGEMENT – 4S	CONNECTOR TYPE/STYLE – MS 3106M SHELL SIZE – 10SL INSERT ARRANGEMENT – 4P	CONTACT MATERIAL/PLATING	COPPER ALLOY/SILVER
		COUPLING NUT MATERIAL/PLATING	ALUMINUM ALLOY/OLIVE DRAB CHROMATE
		MOLD SLEEVE	ALUMINUM/BLACK ANODIZED
		RATED CURRENT [A]	8.8 A
		RATED VOLTAGE [V]	500 V
		OUTER JACKET MATERIAL/COLOR	PVC/BLACK
		CONDUCTOR INSULATION MATERIAL	PVC
		NUMBER OF CONDUCTORS	2x18 AWG
		TEMPERATURE RATING	–40°C to +105°C (–40°F to +221°F)
		PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67,IP68
		CONNECTOR TYPE	MIL-DTL-5015



NOTES: 1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTH. 2. "/S1599" DESIGNATES ATTACHED MATING CLOSURE CAPS TO CORDSET END.					RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
					1.							
					2.							
					3.							
					4.							
MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT ER		DATE 04/15/20		DESCRIPTION MS 3106M-10SL-4S-0864-*--10SL-4P/S1599				
SEE SPECIFICATIONS				APVD T.K.		SCALE 1 = 1.5						
FINISH		CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT				IDENTIFICATION NO.		REV A		
SEE SPECIFICATIONS				MILLIMETER [INCH]								
DO NOT SCALE THIS DRAWING						FILE: 777044573		SHEET 1 OF 1				

A	DRAWING RELEASE	ER	07/06/20	
REV	DESCRIPTION	BY	DATE	ECO NO.