


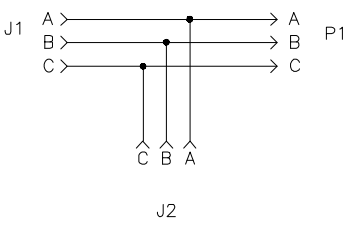



FEMALE END VIEW (J1,J2)	MALE END VIEW (P1)	WIRING DIAGRAM	SPECIFICATIONS		
			DEUTSCH CONNECTOR	DT04-3P-E004 (P1), DT06-3S-PO32 (J1,J2)	
			DEUTSCH WEGELOCK	W3P (P1), W3S (J1,J2)	
			DEUTSCH TERMINALS	0460-202-16141 (P1), 0462-201-16141 (J1,J2)	
			MOLDED HEAD MATERIAL/COLOR	TPU/BLACK	
			RATED CURRENT [A]	10.0 A	
			RATED VOLTAGE [V]	250 V	
			OUTER JACKET MATERIAL/COLOR	TPU/BLACK	
			CONDUCTOR INSULATION MATERIAL	PVC	
			NUMBER OF CONDUCTORS [AWG]		3x18 AWG
			TEMPERATURE RATING		-40°C to +90°C (-40°F to +194°F)

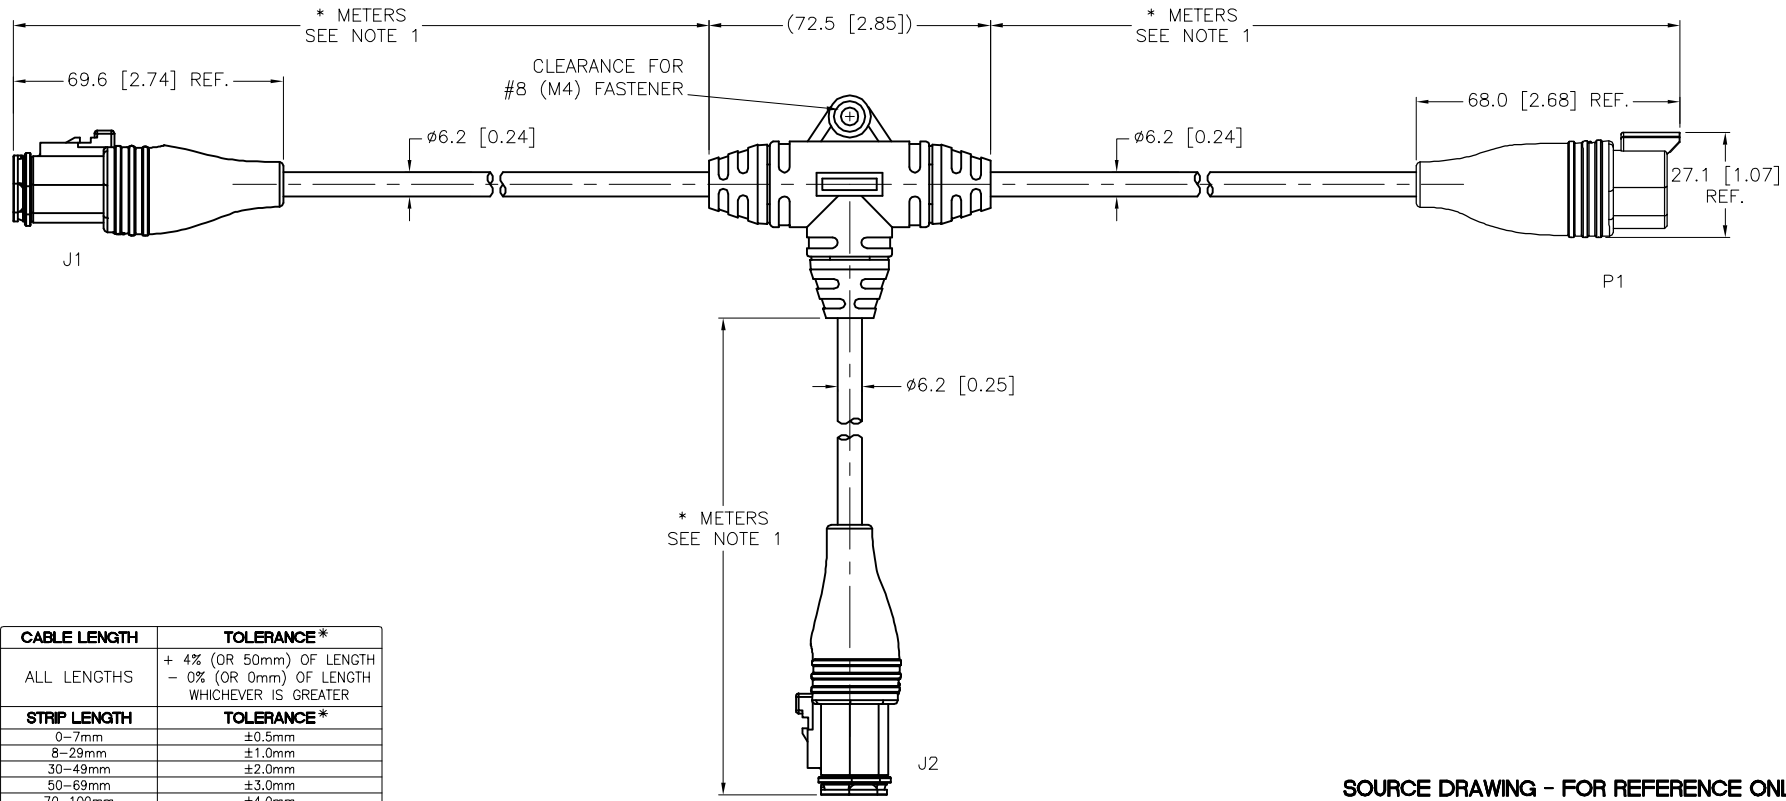

CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

- NOTES:
1. * INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
2. "/S651" DESIGNATES PARALLEL WIRING.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS					3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.							DRFT NF		DATE 07/28/20	
MATERIAL					ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		APVD M.V.		SCALE 1=2.0	
FINISH					CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT MILLIMETER [INCH]		DESCRIPTION DT06-3S-*--DT06-3S-*--DT04-3P-*/S651 (a) (b) (c)	
							DO NOT SCALE THIS DRAWING		IDENTIFICATION NO.	
B UPDATE RATED CURRENT									REV B	
REV DESCRIPTION									FILE: 777044741	
TR 02/07/23 78283									SHEET 1 OF 1	
BY DATE ECO NO.										