



SPECIFICATIONS

HOUSING MATERIAL/COLOR


NYLON 66/BLACK

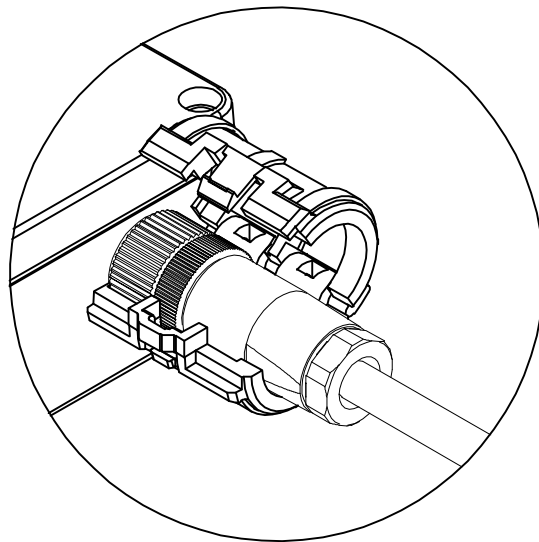

TO INSTALL LOCKOUT DEVICE, PLACE AROUND CORDSET END AND CLOSE UNTIL CONNECTOR SNAPS CLOSED. ARROW SHOULD POINT TOWARDS THE CONNECTOR.

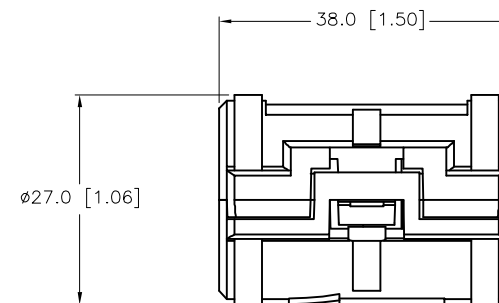

LOCKOUT DEVICE FITS STRAIGHT TURCK EUROFAST FIELD WIREABLE CONNECTORS B(S)(V) 81x1-0 AND B(S)(V) 81x1-0/PG9".

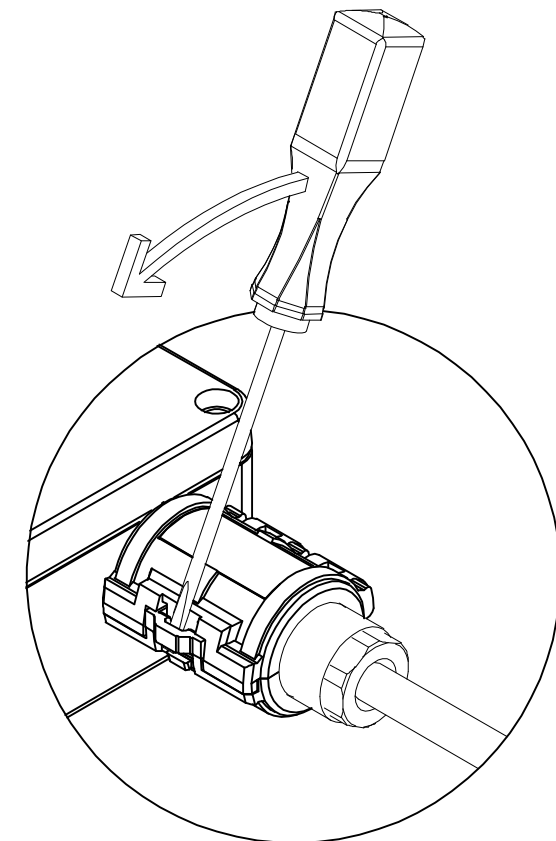

TO REMOVE LOCKOUT DEVICE, INSERT SMALL SCREWDRIVER INTO LOCKING GROOVE AS SHOWN IN PICTURE. ROTATE SCREWDRIVER IN DIRECTION SHOWN UNTIL LOCKING DEVICE RELEASES.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.		MATERIAL		DRFT RDS		DATE 12/29/04	
FINISH		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		APVD		SCALE 1=1.0	
		CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT		DESCRIPTION	
				MILLIMETERS		LOCK-EURO-FW (10/BAG)	
				DO NOT SCALE THIS DRAWING		IDENTIFICATION NO.	
						A0881	
						REV	
						A	
						FILE: A0881	
						SHEET 1 OF 1	

A	DRAWING RELEASE	RDS	12/29/04	
REV	DESCRIPTION	BY	DATE	ECO. NO.