



				SPECIFICATIONS	
				MATERIAL/COLOR	FLUOROELASTOMER COATED FIBERGLASS/BLACK
				TEMPERATURE RATING	-70°C to +220°C (-94°F to +428°F)
				TENSILE STRENGTH	2000 psi @ 24°C; 600 psi @ 149°C
				ELONGATION	150% @ 24°C; 75% @ 149°C
				RATINGS	ASTM-D350, UL 1441, NEMA TF-1, MIL-E-5272, MIL-I-3190/7

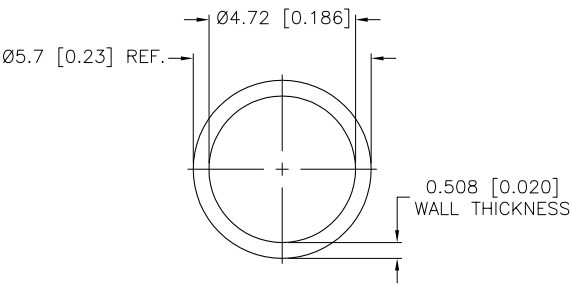

NOTES:

1. 50 FOOT SPOOL OF VITON SLEEVING.

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES: 1. 50 FOOT SPOOL OF VITON SLEEVING.					RELATED DOCUMENTS 1. 2. 3. 4.		3RD ANGLE PROJECTION 		THIS DRAWING IS PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com TURCK INC High Technology Sensors and Automation Controls	
					MATERIAL SEE SPECIFICATIONS		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION		DRFT RDS DATE 07/28/08		DESCRIPTION FFV 3/16INCH BLACK 50 FOOT ROLL	
					FINISH SEE SPECIFICATIONS				DSGN SCALE 1=.3		UNIT OF MEASUREMENT MILLIMETER [INCH]	
					A DRAWING RELEASE		RDS 07/29/08		DO NOT SCALE THIS DRAWING		FILE: A6401	
REV DESCRIPTION		BY DATE ECO NO.										

DO NOT SCALE THIS DRAWING

FILE: A6401

SHEET 1 OF 1