


SPECIFICATIONS	
MATERIAL/COLOR	FLUOROELASTOMER COATED FIBERGLASS/BLACK
TEMPERATURE RATING	-70°C to +220°C (-94°F to +428°F)
TENSILE STRENGTH	2000 psi @ 24°C; 600 psi @ 149°C
ELONGATION	150% @ 24°C; 75% @ 149°C
RATINGS	ASTM-D350, UL 1441, NEMA TF-1, MIL-E-5272, MIL-I-3190/7

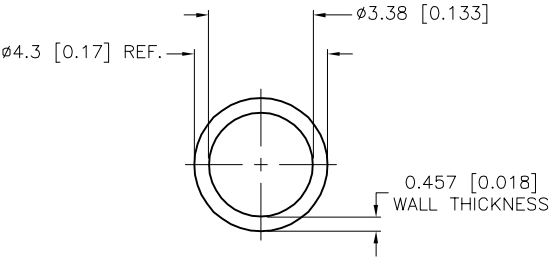

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES: 1. 50 FOOT SPOOL OF VITON SLEEVING.					RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us				
					1.										
					2.										
					3.										
4.		MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT		RDS		DATE 07/28/08		DESCRIPTION FFV 1/8INCH BLACK 50 FOOT ROLL			
SEE SPECIFICATIONS		APVD				SCALE 1=.3									
FINISH		SEE SPECIFICATIONS		CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT MILLIMETER [INCH]				IDENTIFICATION NO. A9276		REV A			
DO NOT SCALE THIS DRAWING						FILE: A9276		SHEET 1 OF 1							
A	DRAWING RELEASE				RDS	07/29/08									
REV	DESCRIPTION				BY	DATE		ECO NO.							