SPECIFICATIONS	
SPACER MATERIAL/COLOR	PVC/BLACK
ADHESIVE SPACER MATERIAL/COLOR	RUBBER SPONGE/BLACK
OPERATING TEMPERATURE	−40˚C to +104.4˚C (−40˚F to +220˚F)

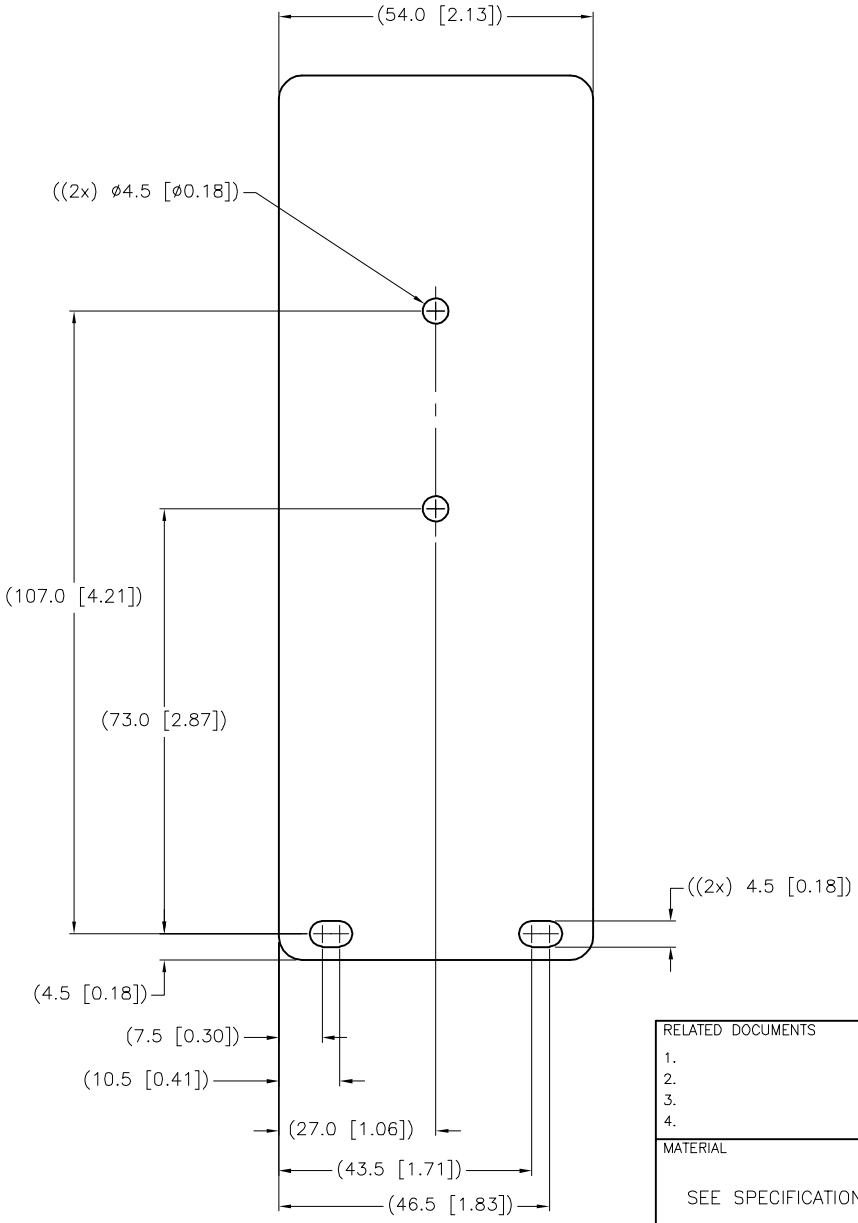

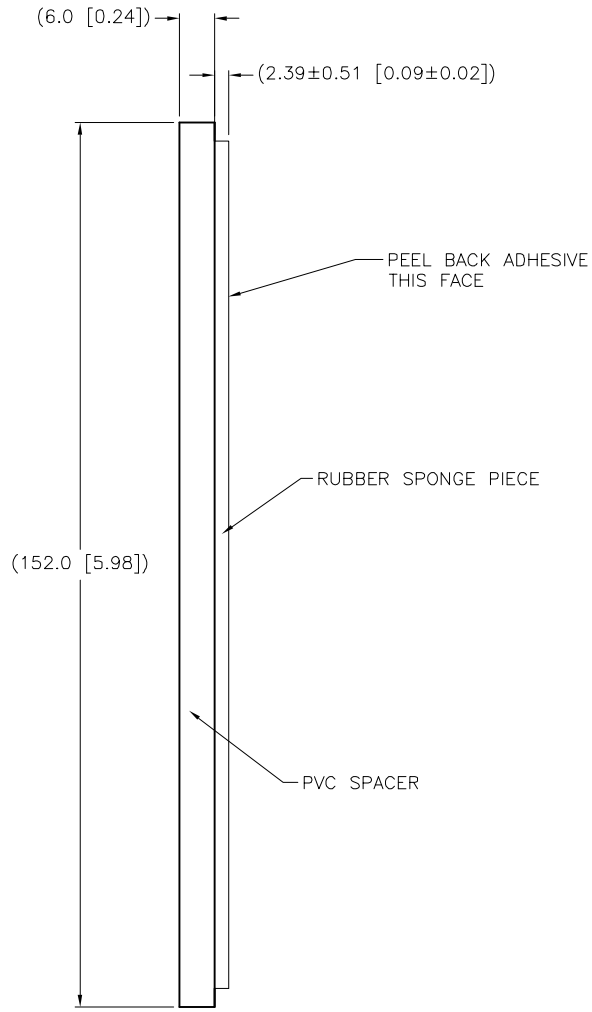

SOURCE DRAWING - FOR REFERENCE ONLY

REV	DESCRIPTION	BY	DATE	ECO NO.
A	DRAWING RELEASE	GB	09/11/07	

RELATED DOCUMENTS
1.
2.
3.
4.

3RD ANGLE PROJECTION

THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

TURCK

3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1-800-544-7769
(763) 553-7300
(763) 553-0708 fax
www.turck.us

MATERIAL: SEE SPECIFICATIONS

FINISH: SEE SPECIFICATIONS

ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY

CONTACT TURCK FOR MORE INFORMATION

DRFT: GB | DATE: 07/16/07

APVD: | SCALE: 1=1.3

UNIT OF MEASUREMENT

MILLIMETER [INCH]

DO NOT SCALE THIS DRAWING

DESCRIPTION: SPACER, 8MB12Z

IDENTIFICATION NO.: A9336 | REV: A

FILE: A9336 | SHEET 1 OF 1