




NOTES:

- 1. TERMINATION PROGRAMMABLE VIA SLIDE SWITCH:  
ON: TERMINATED  
OFF: PASSIVE TEE
- 2. SUPPORTS TRANSMISSION RATES UP TO 12 Mbits/sec.
- 3. FIELD WIREABLE 9 PINS, D-SUB FOR PROFIBUS COMMUNICATION.

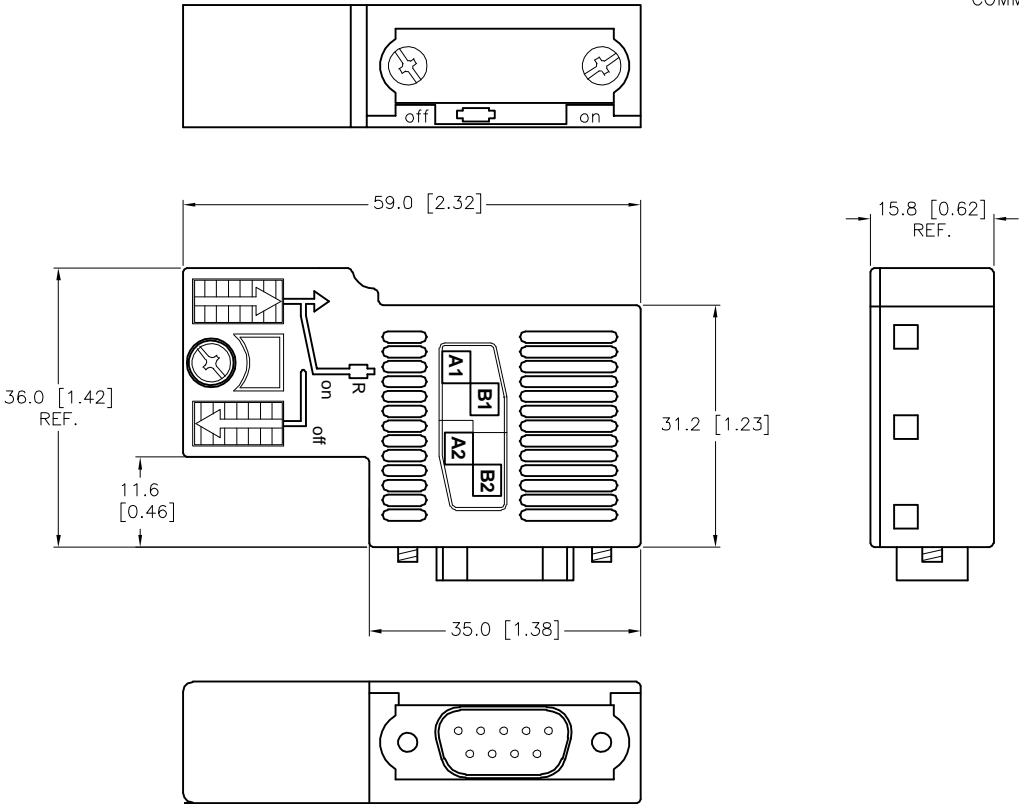

SOURCE DRAWING - FOR REFERENCE ONLY

<div>RELATED DOCUMENTS</div> <div>1. 2. 3. 4.</div>					<div>3RD ANGLE PROJECTION</div> <div></div>		<div>THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.</div>		<div>3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us</div> <div></div>			
					<div>MATERIAL</div>		<div>ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY</div>		<div>DRFT RWC</div> <div>DATE 03/24/08</div>		<div>DESCRIPTION</div> <div>CONNECTOR,PDP,D9S</div>	
									<div>APVD</div> <div>SCALE 1 = 1.0</div>			
					<div>FINISH</div>		<div>CONTACT TURCK FOR MORE INFORMATION</div>		<div>UNIT OF MEASUREMENT</div> <div>MILLIMETER [ INCH ]</div> <div>DO NOT SCALE THIS DRAWING</div>		<div>IDENTIFICATION NO.</div> <div>A9421</div>	
<div>FILE: A9421</div>		<div>SHEET 1 OF 1</div>										
<div>B UPDATE TO NEW LOOK CONNECTOR</div>		<div>RDS</div>	<div>11/21/08</div>	<div>21206</div>								
<div>REV DESCRIPTION</div>		<div>BY</div>	<div>DATE</div>	<div>ECO NO.</div>								