


NOTES:

1. TERMINATION PROGRAMMABLE VIA SLIDE SWITCH:  
ON: TERMINATED  
OFF: PASSIVE TEE
2. SUPPORTS TRANSMISSION RATES UP TO 12 Mbits/sec.
3. FIELD WIREABLE 9 PINS, D-SUB FOR PROFIBUS COMMUNICATION.

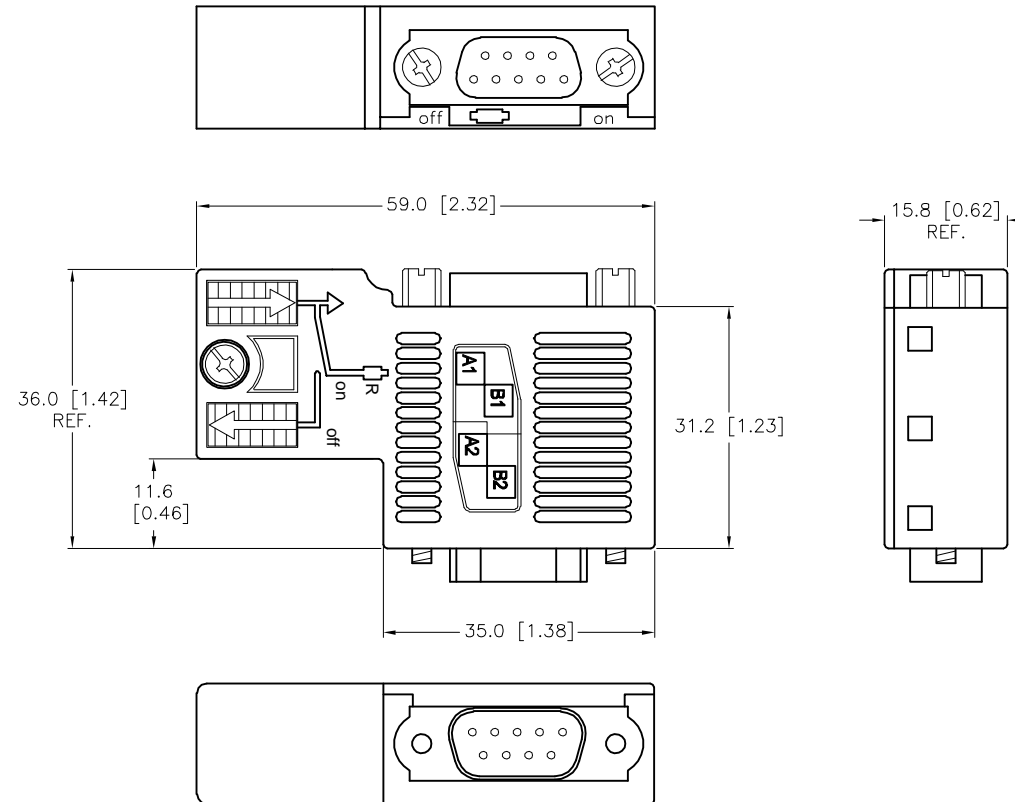

SOURCE DRAWING - FOR REFERENCE ONLY

<p>RELATED DOCUMENTS</p> <ol style="list-style-type: none"> <li>1.</li> <li>2.</li> <li>3.</li> <li>4.</li> </ol>	<p>3RD ANGLE PROJECTION</p>	<p>THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.</p>		<p>3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us</p>	
		DRFT	RWC	DATE	03/24/08
		APVD		SCALE	1=1.0
		UNIT OF MEASUREMENT		DESCRIPTION	
MATERIAL	<p>ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY</p>	MILLIMETER [ INCH ]		CONNECTOR,PDP,D9SM	
FINISH		DO NOT SCALE THIS DRAWING		IDENTIFICATION NO.	REV
	CONTACT TURCK FOR MORE INFORMATION			A9426	C
				FILE: A9426	SHEET 1 OF 1

C	GET CONNECTOR LABELS TO SHOW	RDS	12/14/09	29165
REV	DESCRIPTION	BY	DATE	ECO. NO.