
NOTES:

- 1. TERMINATION PROGRAMMABLE VIA SLIDE SWITCH: ON: TERMINATED OFF: PASSIVE TEE
- 2. SUPPORTS TRANSMISSION RATES UP TO 12 Mbits/sec.
- 3. FIELD WIREABLE 9 PINS, D—SUB FOR PROFIBUS COMMUNICATION.

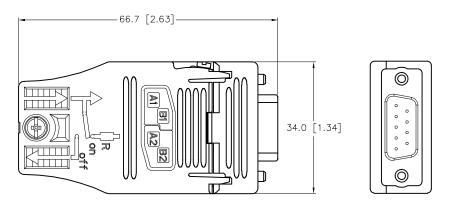

SOURCE DRAWING - FOR REFERENCE ONLY

					RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		JRCK M	3000 CAMPUS NNEAPOLIS, MN 1-800-544-7 (763) 553-7 (763) 553-0 www.turck.u	N 55441 7769 '300)708 fax
			MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK	APVD	DATE 03/24/08 SCALE 1=1.0	B DESCRIPTION CONNECTOR, PDP, SD9S				
					UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO. A9427				
	UPDATE SD9S CONNECTOR	RDS	06/09/09	26324		FOR MORE INFORMATION					
′	DESCRIPTION	BY	DATE	ECO NO.			DO NOT SCALE	THIS DRAWING	FILE: A9427	SHEET	1 OF 1