


NOTES:

1. TERMINATION PROGRAMMABLE VIA SLIDE SWITCH:
ON: TERMINATED
OFF: PASSIVE TEE
2. SUPPORTS TRANSMISSION RATES UP TO 12 Mbits/sec.
3. FIELD WIREABLE 9 PINS, D-SUB FOR PROFIBUS COMMUNICATION.

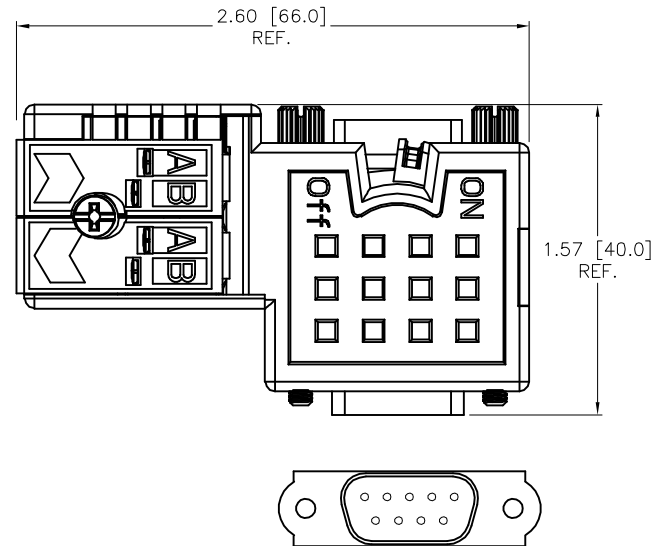

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS		3RD ANGLE PROJECTION		<div>THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.</div> <div>TURCK</div>		<div>3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us</div>			
1. 2. 3. 4.									
MATERIAL		DRFT RDS		DATE 10/07/08				DESCRIPTION CONNECTOR,PDP,D9S,VIPA	
FINISH		APVD		SCALE 1=1.0					
		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		UNIT OF MEASUREMENT INCH [MILLIMETER]		IDENTIFICATION NO. A9524		REV A	
		CONTACT TURCK FOR MORE INFORMATION		DO NOT SCALE THIS DRAWING		FILE: A9524		SHEET 1 OF 1	

A	DRAWING RELEASE	RDS	10/07/08	
REV	DESCRIPTION	BY	DATE	ECO. NO.