

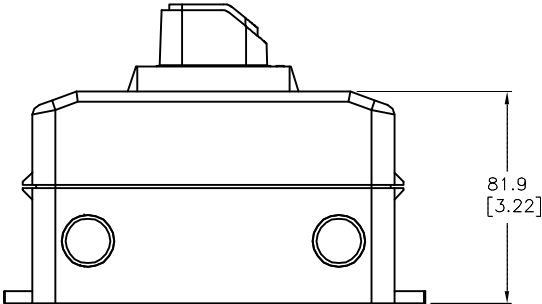

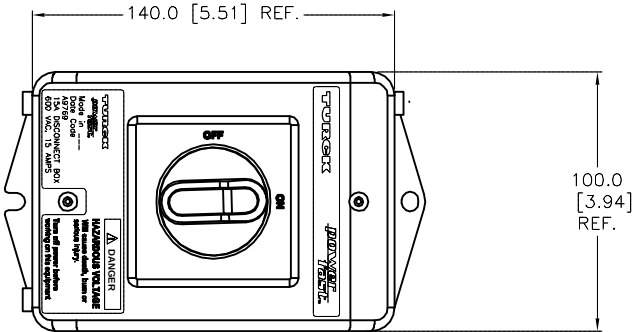


SPECIFICATIONS

ENCLOSURE MATERIAL	POLYCARBONATE
PROTECTION CLASS	NEMA 12 AND IEC IP65
OPERATING VOLTAGE [V]	600 V
OPERATING CURRENT [A]	15.0 A
MAXIMUM HORSEPOWER RATING	1 HP @ 120 V, SINGLE PHASE 1.5 HP @ 240 V, SINGLE PHASE 5 HP @ 240 V, THREE PHASE 10 HP @ 480 V, THREE PHASE 10 HP @ 600 V, THREE PHASE



SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK INC High Technology Sensors and Automation Controls 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com					
1.				DRFT	RDS	DATE	04/04/13	DESCRIPTION 15A DISCONNECT BOX			
2.				APVD	T.K.	SCALE	1=3.0				
3.				UNIT OF MEASUREMENT				IDENTIFICATION NO. A9769		REV A	
4.				MILLIMETER [INCH]							
MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		CONTACT TURCK FOR MORE INFORMATION		DO NOT SCALE THIS DRAWING		FILE: A9769		SHEET 1 OF 1	
SEE SPECIFICATIONS											
FINISH											
SEE SPECIFICATIONS											



CAUTION:

RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD

A	DRAWING RELEASE	RDS	04/04/13	
REV	DESCRIPTION	BY	DATE	ECO NO.