

Rated Load**16 A / 400 V****Specifications**

Rated impulse withstand voltage

– Pin / Pin

2.5 kV rms / 1 min

Ambient temperature operation/storage

-4060 °C / -40 ... 80 °C (no ice)


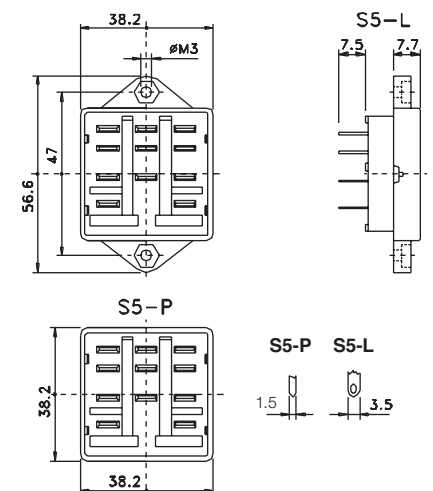
Weight

20g

Optional Accessories

Retaining spring, steel

S5-CL for C5 / C5x Relays

**Printed circuit lay-out [mm]****Dimensions [mm]****Technical approvals, conformities**