

Rated Load**16 A / 400 V****Specifications**

Rated impulse withstand voltage

– All terminals / DIN rail

4 kV rms / 1 min

– Terminal / Terminal

4 kV rms / 1 min

Cross-section of connecting wire

– Single-wire

1 x 6 mm² / AWG 10, 2 x 2.5 mm² / AWG 14

– Multi wire

1 x 6 mm² / AWG 10, 2 x 1.5 mm² / AWG 16

Nominal screw torque

1 Nm

Screw dimensions

M3.5 Pozi slot

Mounting

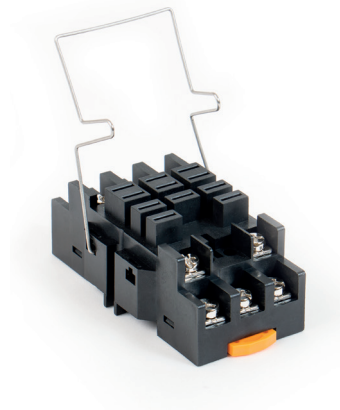
TS-35 or Back Panel Mounting

Ambient temperature operation / storage

-40 ... 60° C / -40 ... 80° C (no ice)

Weight

92g

**Integrated Accessories**

A2-Connector

C-A2

Retaining clip, plastic

S5M-CP for C5 / C5x Relays

A1-, B1-Connector

SC-3

Optional Accessories

Retaining Clip, steel

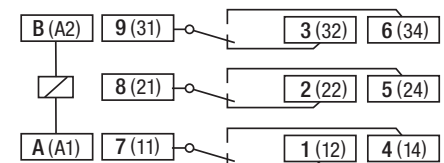
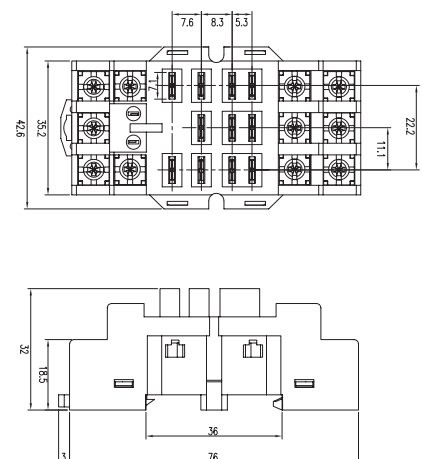
HF-32 (BAG 10 PCS) for C5 / C5x Relays

A2-Connector

C-A2 (BAG 5 PCS), C-A2 (BAG 50 PCS)

A1-, B1-Connector

SC-3 (BAG 10 PCS)

**Anschlussschema****Abmessungen [mm]****Technische Zulassungen, Konformitäten**