

**Rated Load****10 A / 250 V****Specifications**

Rated impulse withstand voltage

– All terminals / DIN rail

2.5 kV rms / 1 min

– Terminal / Terminal

2.5 kV rms / 1 min

Cross-section of connecting wire

– Single-wire

4 mm<sup>2</sup> / AWG 12, 2 x 2.5 mm<sup>2</sup> / AWG 14

– Multi wire

0.34 mm<sup>2</sup> / AWG 22 - 2.5 mm<sup>2</sup> / AWG 14

Nominal screw torque

0.7 Nm

Screw dimensions

M3 Pozi slot

Mounting

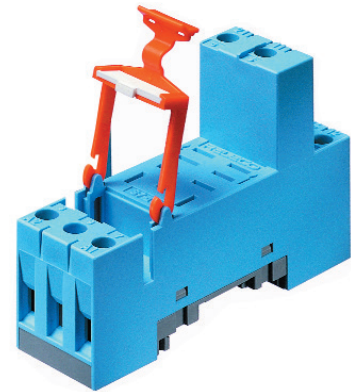
TS-35 or Back Panel Mounting

Ambient temperature operation/storage

-40...60 °C / -40 ... 80 °C (no ice)

Weight

38g

**Included Accessories**

Retaining clip, plastic

S9-C for C7 / C7x Relays

**Optional Accessories**

Retaining clip, plastic

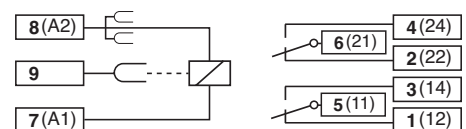
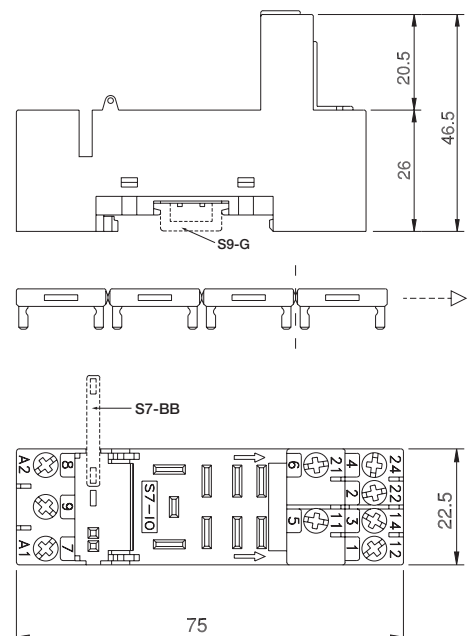
S9-C (BAG 10 PCS) for C7 / C7x Relays

A2-Connector

S7-BB (BAG 20 PCS)

Panel Adapter

S9-G (BAG 10 PCS)

**Connection diagram****Dimensions [mm]****Technical approvals, conformities**