

S9-M**Socket for 14-pin Relays****Rated Load****6 A / 250 V****Specifications**

Rated impulse withstand voltage

– All terminals / DIN rail

2.5 kV rms / 1 min

– Terminal / Terminal

2.5 kV rms / 1 min

Cross-section of connecting wire

– Single-wire

4 mm² / AWG 12 or 2 x 2.5 mm² / AWG 14

– Multi-wire

0.34mm² / 22 - 2.5 mm² / AWG 14

Nominal screw torque

0.7 Nm

Screw dimensions

M3 Pozi slot

Mounting

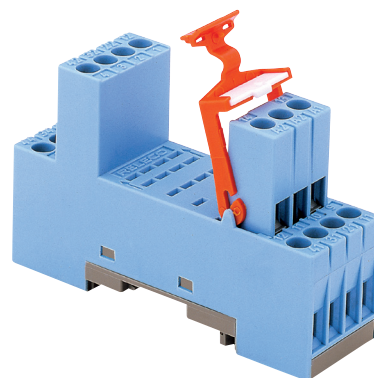
TS-35 or Back Panel Mounting

Ambient temperature operation/storage

-4060 °C / -40 ... 80 °C (no ice)

Weight

54g

**Included Accessories**

Retaining clip, plastic

S9-C for C9 / C9x Relays

Optional Accessories

Retaining clip, plastic

S9 (BAG 10 PCS) for C9 / C9x Relays

Panel Adapter

S9-G (BAG 10 PCS)

Bridge Bar

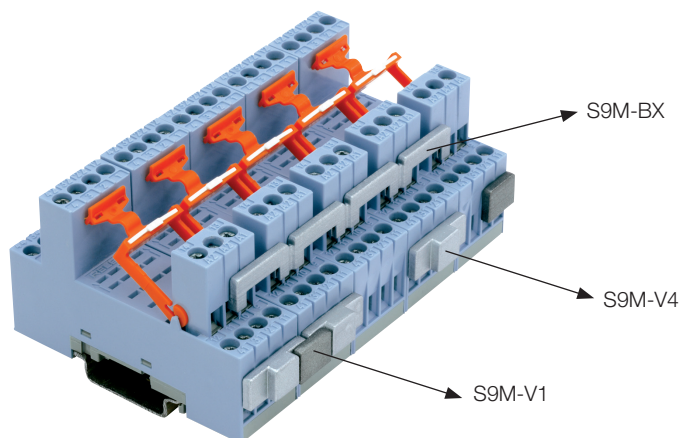
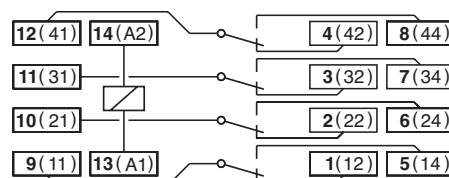
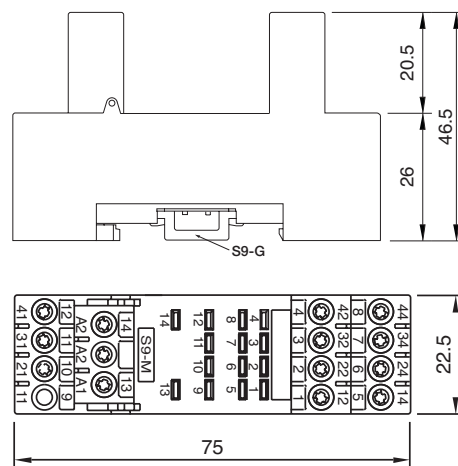
S9M-V1 (BAG 5 PCS)

Bridge Bar

S9M-V4 (BAG 5 PCS)

Bridge Bar

S9M-BX (BAG 5 PCS)

**Connection diagram****Dimensions [mm]****Technical approvals, conformities**