

C3-T3x**3 pole | changeover twin contact | plug-in****TURCK****comat**
RELECO
WORLD OF RELAYS

Maximum contact load	6 A/250 V	AC-1	6 A/30 V	DC-1
Recommended minimum contact load	5 mA/5 V	Code 1		
	1 mA/5 V	Code 2		

Contacts

Material	Standard	Code 1	AgNi + 0.2 µ Au
	Optional	Code 2	AgNi + 5 µ Au
Rated Load			6 A
Switch-on current max. (20 ms)			15 A
Switching voltage max.			250 V
AC load (Fig 1)			1.2 kVA
DC load			see Fig. 2

Coil

Coil resistance	see table; tolerance ± 10 %
Pick-up voltage	≤ 0.8 x U _N
Release voltage	≥ 0.1 x U _N
Nominal power	2.2 VA (AC)/1.3 W (DC)

Coil table

V AC	Ω	mA	VDC	Ω	mA
24	67	92	24	480	50
48	296	46	48	1K8	26
115	1K7	19	110	9K	12
230	7K1	9.5	220	36K1	6

Insulation

	Volt rms / 1 min
Contact open	1000 V
Contact/contact	2.5 kV
Contact/coil	2.5 kV
Insulation resistance at 500 V	≥ 1 GΩ
Insulation, EN 61810-1	2.5 kV

Specifications

Ambient temperature operation/storage	-40 ... 70 °C / -40 ... 80 °C (no ice)
Pick-up time/bounce time	8 ms/≤ 3 ms
Release time/bounce time	18 ms/≤ 1 ms
Mechanical life ops	AC: 10 Mill./DC: 20 Mill.
DC voltage endurance at rated load	≥ 100 000 switching cycles
Switching frequency at rated load	≤ 1200/ops/h
Weight	81 g

Product References**V AC 50 Hz/60 Hz: 24, 48, 115 (120), 230 (240)****LED****RC Suppressor****VDC 24, 48, 110, 220****LED****Free wheeling diode****Polarity and free wheeling diode****AC/DC bridge rectifier 24 V, 48 V, 60 V**

Other voltages on request



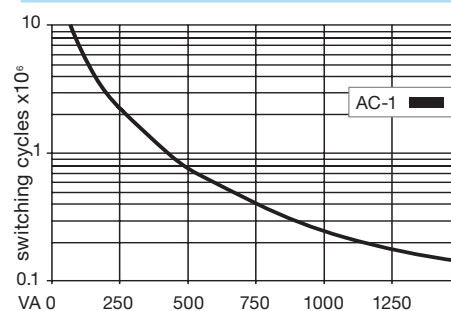
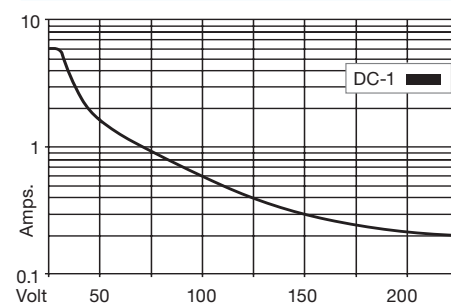
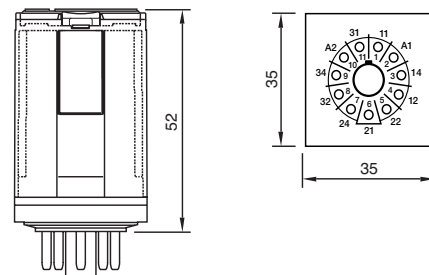
C3-T31/AC ... V
C3-T31X/AC ... V
C3-T31R/AC ... V**C3-T31/DC ... V**
C3-T31X/DC ... V
C3-T31DX/DC ... V
C3-T31FX/DC ... V**C3-T31BX/UC ... V****C3-T32/AC ... V**
C3-T32X/AC ... V
C3-T32R/AC ... V**C3-T32/DC ... V**
C3-T32X/DC ... V
C3-T32DX/DC ... V
C3-T32FX/DC ... V**C3-T32BX/UC ... V**

"..." List Coil Voltage to complete Product References

Accessories (See also Section Sockets)

Socket:

Blanking Plug:

S3-B, S3-S, S3-L, S3-PO, S3-MB0, S3-MB1
SO-NP (BAG 10 PCS)**Connection diagram****Fig.1 AC voltage endurance****Fig. 2 DC load limit curve****Dimensions****Technical approvals, conformities**

IEC/EN 61810; IEC/EN 60947