



I/O Module for DeviceNet FDNL-XSG16-T

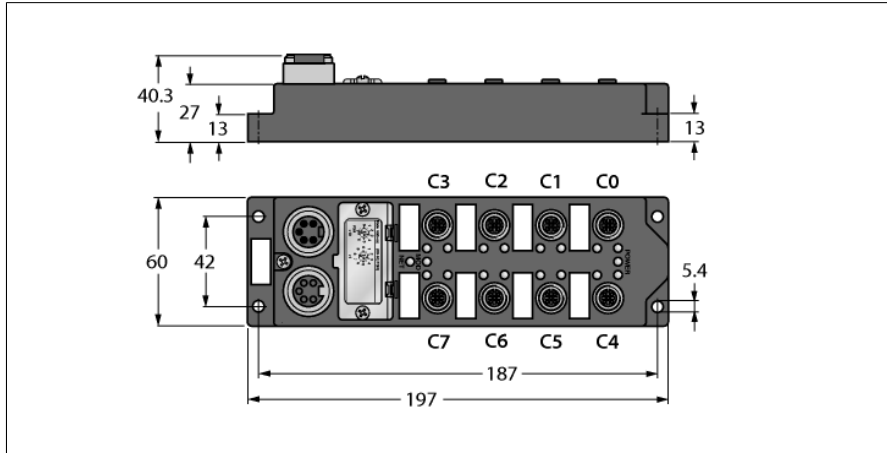

- 16 inputs or outputs
- PNP short-circuit protected inputs
- 0.5 amp short-circuit protected outputs
- Fiber-glass reinforced PA6 housing
- Vibration and shock-resistant
- Encapsulated module electronics
- Metal connectors
- Degree of protection IP67



ID	F2026
Number of channels	16
Ambient temperature	-40...+70 °C
Protection class	IP67