





MALE END VIEW	USB END VIEW	TYPICAL PANEL CUTOUT	SPECIFICATIONS	
 1 = RED 2 = WHITE 3 = GREEN 4 = BLACK	 1 = RED (USBVCCO) 2 = WHITE (USBD0-) 3 = GREEN (USBD0+) 4 = BLACK (USBGND)		CONTACT CARRIER MATERIAL (EURO)	NYLON OR TPU
			MOLDED HEAD MATERIAL/COLOR (EURO)	TPU/YELLOW
			CONTACT MATERIAL/PLATING (EURO)	BRASS/GOLD
			HOUSING MATERIAL/FINISH (EURO)	BRASS/NICKEL
			RATED CURRENT [A]	1.0 A
			RATED VOLTAGE [V]	30 V
			OUTER CABLE JACKET MATERIAL/COLOR	PVC/BLACK
			CONDUCTOR INSULATION MATERIAL	PE (DATA), SRPVC (POWER)
			NUMBER OF CONDUCTORS [AWG]	2x28 AWG (DATA), 2x24 AWG (POWER)
			SHIELDING	TINNED-COPPER BRAIDED
			TEMPERATURE RANGE	-40°C to +75°C (-40°F to +167°F)
			PROTECTION CLASS (EURO)	MEETS IEC IP67

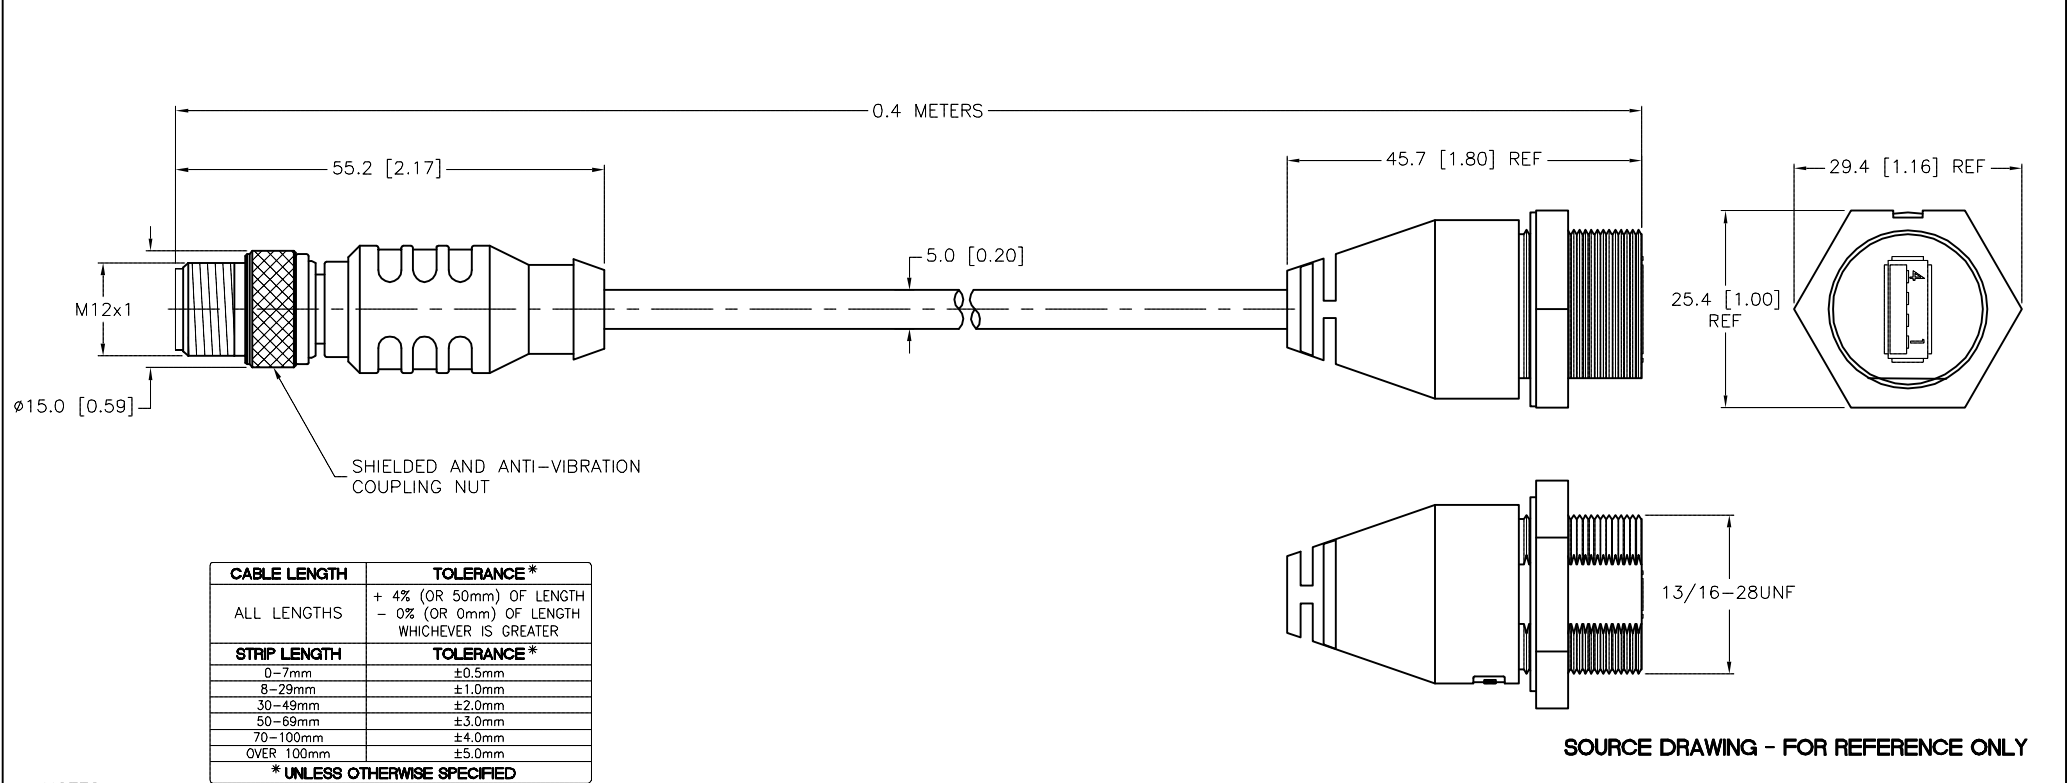

NOTES:

1. TURCK EQUIVALENT: RSS 4.4T-0.4-USB/AFP.

2. CABLE ASSEMBLY FOR EUROFAST ARE RATED AS STAND ALONE. OVERALL CABLE ASSEMBLY RATING IS THE RESPONSIBILITY OF THE CUSTOMER.

NOTES:

1. TURCK EQUIVALENT: RSS 4.4T-0.4-USB/AFP.

2. CABLE ASSEMBLY FOR EUROFAST ARE RATED AS STAND ALONE. OVERALL CABLE ASSEMBLY RATING IS THE RESPONSIBILITY OF THE CUSTOMER.

RELATED DOCUMENTS


1.

2.

3.

4.

3RD ANGLE PROJECTION



THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

3000 CAMPUS DRIVE

MINNEAPOLIS, MN 55441

1-800-544-7769

(763) 553-7300

(763) 553-0708 fax

turck.com

MATERIAL

SEE SPECIFICATIONS

FINISH

SEE SPECIFICATIONS

ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY

CONTACT TURCK FOR MORE INFORMATION

DRFT

RDS

DATE 06/12/13

APVD

SCALE 1 = 1.0

UNIT OF MEASUREMENT

MILLIMETER [INCH]

DO NOT SCALE THIS DRAWING

DESCRIPTION

DEMO,CPE,M12,USB/AFP,MOLDON

IDENTIFICATION NO.

U-63947

REV

A

FILE: U-63947

SHEET 1 OF 1