





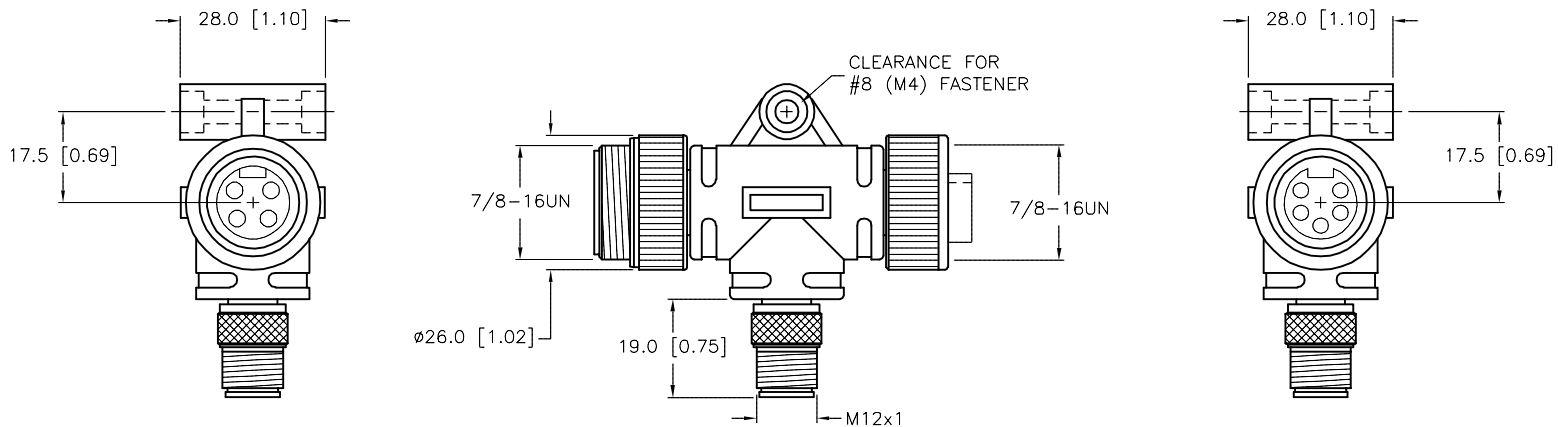
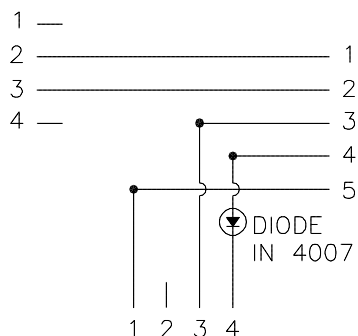


MALE END VIEW	MALE END VIEW	FEMALE END VIEW	SPECIFICATIONS	
			CONTACT CARRIER MATERIAL	TPU
			MOLDED HEAD MATERIAL/COLOR	TPU/RED
			CONTACT MATERIAL/PLATING	BRASS/GOLD
			COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
			RATED CURRENT [A]	4.0 A
			RATED VOLTAGE [V]	250 V
			TEMPERATURE RATING	-25°C TO +55°C (-13°F TO +131°F)
			PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67





WIRING DIAGRAM



NOTES:

1."/S815" INDICATES SPECIAL WIRING FOR ENHANCED E-STOP DETECTION.

D	UPDATE RATED VOLTAGE	NF	08/02/17	61408
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS  1.  2.  3.  4.	3RD ANGLE PROJECTION  	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
	MATERIAL	DRFT IK	DATE 9/16/97	DESCRIPTION RSM 40 FSM 4 RKM 50/S815	
FINISH	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY  CONTACT TURCK FOR MORE INFORMATION	APVD	SCALE 1=1.5	IDENTIFICATION NO.  U0102-21	
		UNIT OF MEASUREMENT  MILLIMETER [ INCH ]		REV  D	
		DO NOT SCALE THIS DRAWING		FILE: U0102-21	SHEET 1 OF 1