


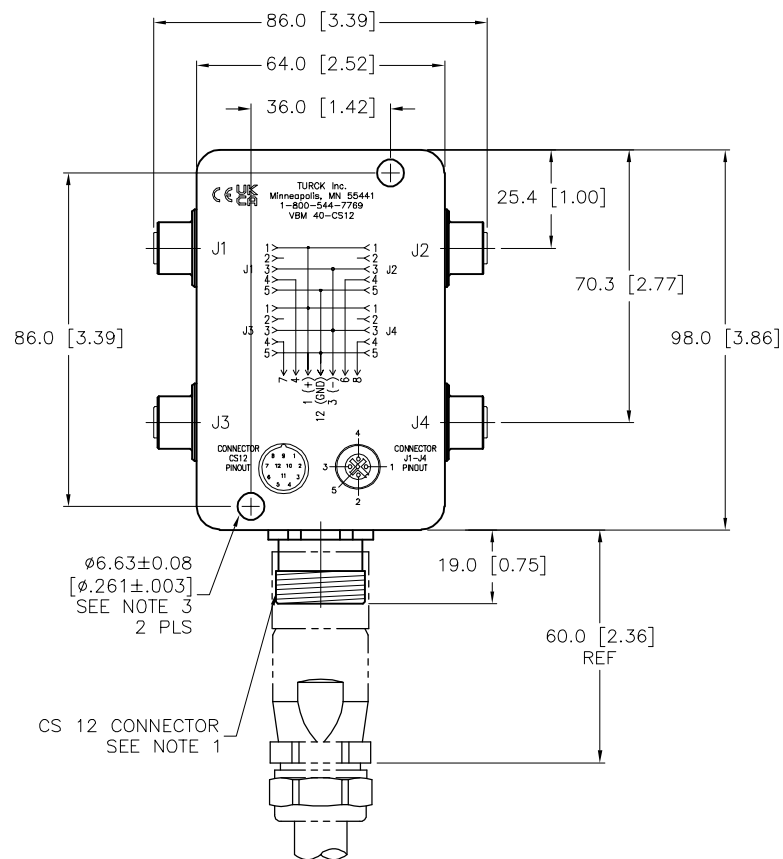

NOTES:

1. USE MATING CORDSET CK12-7-* (* = CABLE LENGTH IN METERS).
2. BOX HEIGHT = 1.36 [34.5] NOMINAL.
3. CLEARANCE HOLE FOR 1/4-20 MOUNTING SCREWS (NOT INCLUDED).

SPECIFICATIONS

CABLE DATA

MATING PLUG CABLE

CK12-0-* or CK12-7-*

MATERIAL

HOUSING

ALUMINUM ALLOY

CONNECTOR

NICKEL PLATED BRASS

CONTACT CARRIERS/BLACK

TPU

CONTACTS

GOLD PLATED BRASS

ELECTRICAL DATA

OPERATING VOLTAGE

10-48 VDC

OPERATING CURRENT

4.0 A per PORT, 8.0 A TOTAL

MECHANICAL DATA


PROTECTION CLASS to DIN 40050

IP 67 - ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED


OPERATING TEMPERATURE

-40°C to 90°C (-40°F to 194°F)


CS 12 PIN-OUT



J1-J4 PIN-OUT



WIRING DIAGRAM

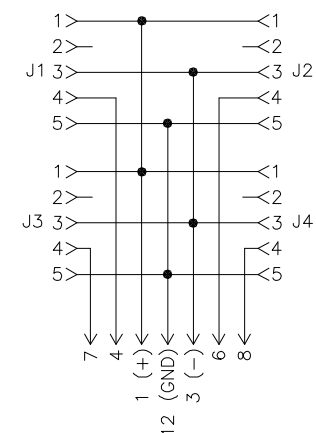

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION 	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us TURCK	
		DRFT	IK	DATE	11/4/98
		APVD		SCALE	1=2
		UNIT OF MEASUREMENT MILLIMETER [INCH]		DESCRIPTION VBM 40-CS12	
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	CONTACT TURCK FOR MORE INFORMATION		IDENTIFICATION NO. U0114-10	
FINISH				REV C	
				DO NOT SCALE THIS DRAWING	
C	ADD CE-UKCA MARK TO CLICHE	RDS	04/29/22	500000004984	
REV	DESCRIPTION	BY	DATE	ECO NO.	
FILE: U0114-10				SHEET 1 OF 1	