



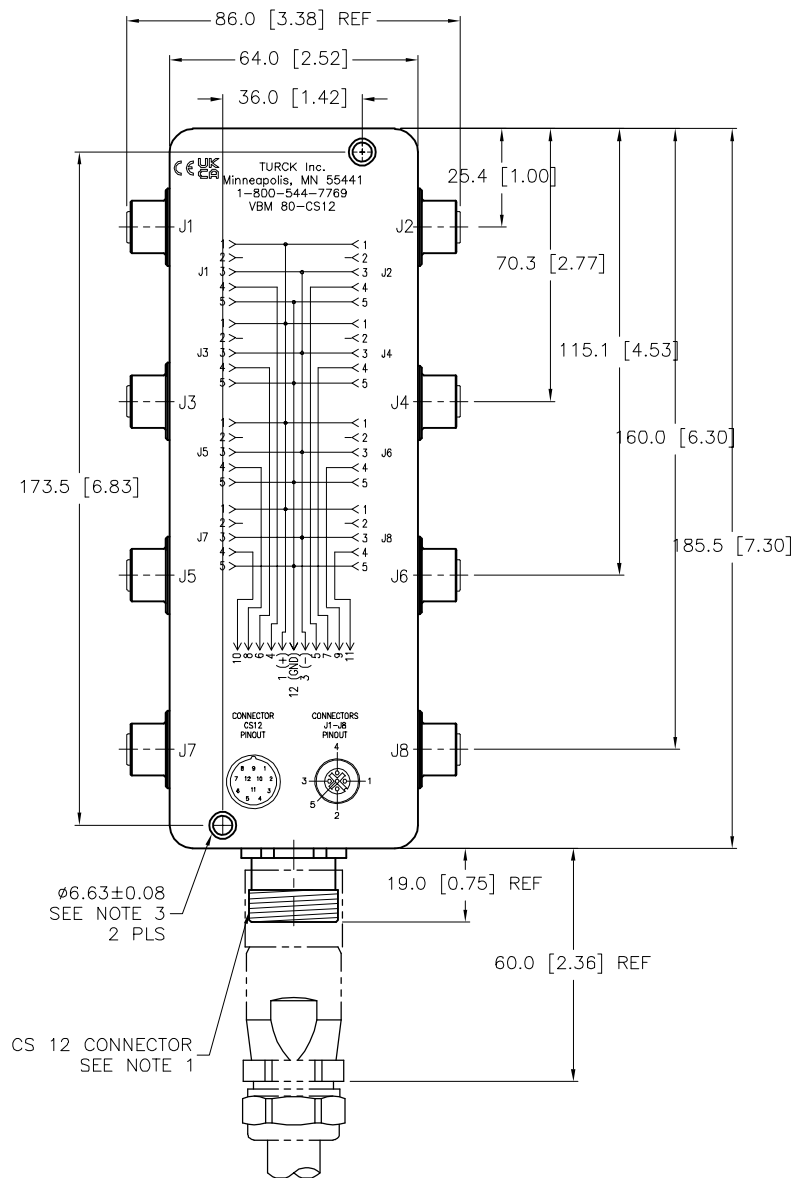

SPECIFICATIONS

CABLE DATA	
MATING PLUG CABLE	CK 12-0 or CK 12-11-*
MATERIAL	
HOUSING MATERIAL	ALUMINUM ALLOY
RECEPTACLE/PLATING	BRASS/NICKEL
CONTACT CARRIER MATERIAL/COLOR	TPU/BLACK
CONTACT MATERIAL/PLATING	BRASS/GOLD
ELECTRICAL DATA	
OPERATING VOLTAGE	10-48 VDC
OPERATING CURRENT	4.0 A per PORT, 8.0 A TOTAL
MECHANICAL DATA	
PROTECTION CLASS to DIN 40050	IP 67 - ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATING TEMPERATURE	-40°C to 90°C (-40°F to 194°F)

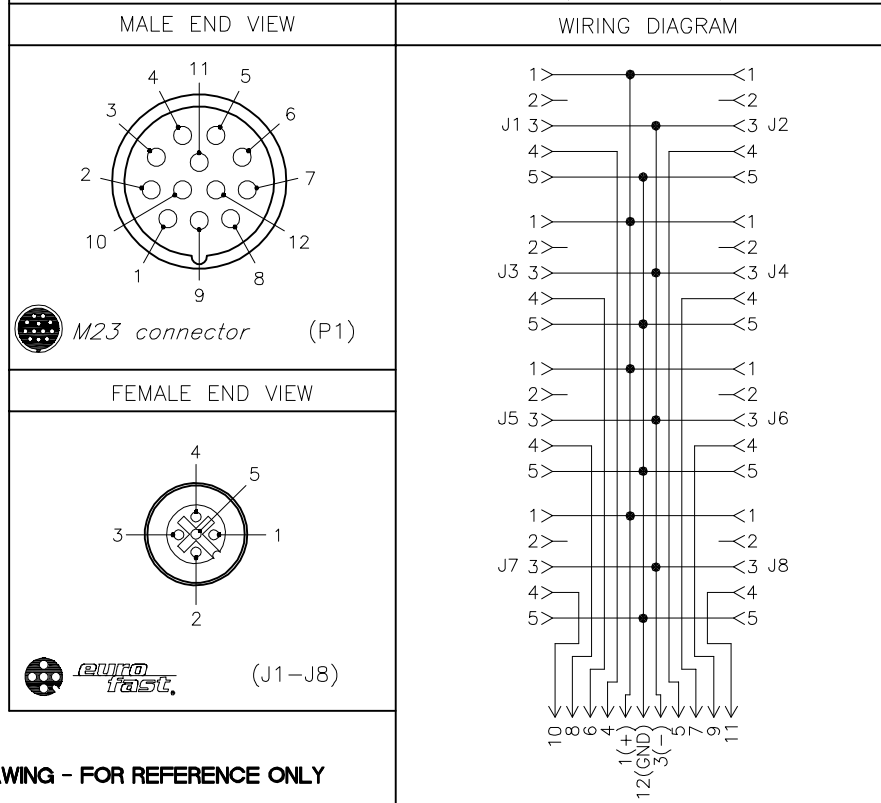

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

1. USE MATING CORDSET CK 12-11-* (* = CABLE LENGTH IN METERS).
2. BOX HEIGHT = 34.5 NOMINAL.
3. CLEARANCE HOLE FOR M4 [#8] MOUNTING SCREWS (2 NOT INCLUDED).

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us			
1. 2. 3. 4.											
MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT		IK		DATE 11/4/98		DESCRIPTION VBM 80-CS12	
FINISH				APVD				SCALE 1=2			
4				CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT				IDENTIFICATION NO.	
		MILLIMETER [INCH]				U0114-12		E			
				DO NOT SCALE THIS DRAWING				FILE: U0114-12		SHEET 1 OF 1	

E	ADD CE-UKCA MARK TO CLICHE	RDS	04/29/22	500000004984
REV	DESCRIPTION	BY	DATE	ECO NO.