


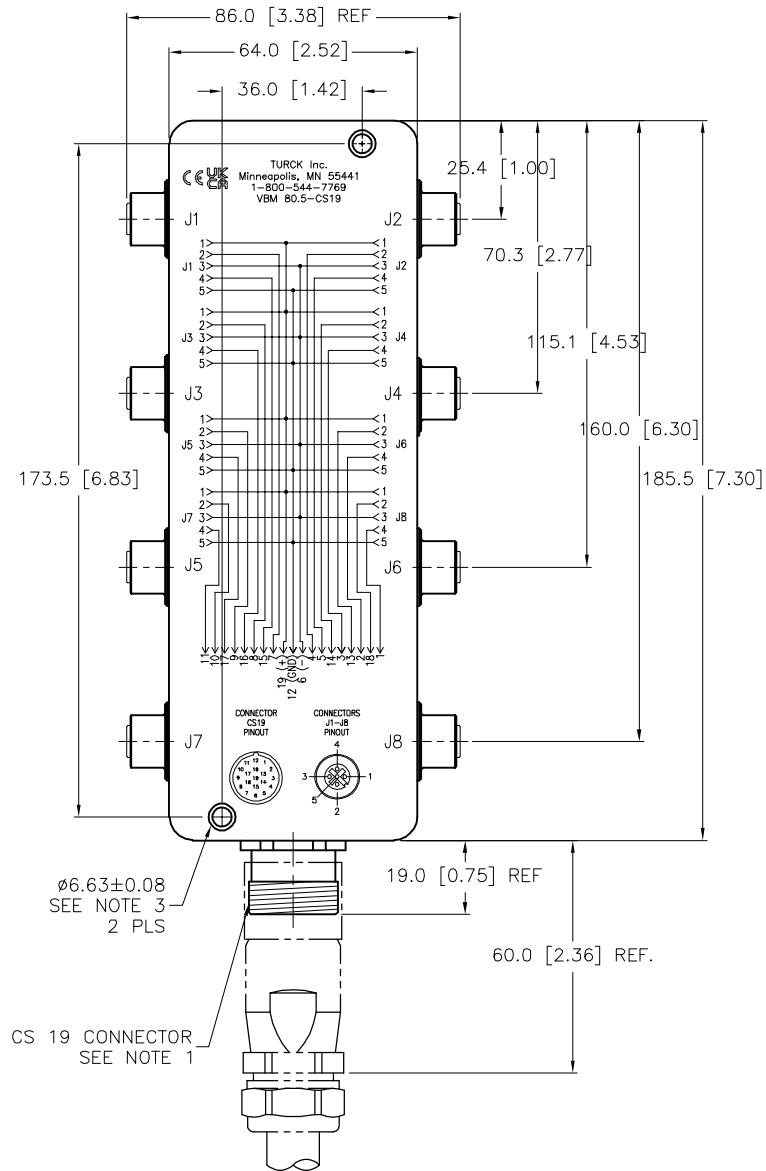

NOTES:


- USE MATING CORDSET CK 19-19-* (* = CABLE LENGTH IN METERS).
- BOX HEIGHT = 34.5 NOMINAL.
- CLEARANCE HOLE FOR M4 [#8] MOUNTING SCREWS (2 NOT INCLUDED).

SPECIFICATIONS



CABLE DATA	
MATING PLUG CABLE	CK 19-0 or CK 19-19-*
MATERIAL	
HOUSING	ALUMINUM ALLOY
CONNECTOR	NICKEL PLATED BRASS
CONTACT CARRIERS/COLOR	TPU/BLACK
CONTACTS	GOLD PLATED BRASS
ELECTRICAL DATA	
OPERATING VOLTAGE	10-48 VDC
OPERATING CURRENT	4.0 A per PORT, 8 A TOTAL
PROTECTION CLASS to DIN 40050	IP 67 - ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATING TEMPERATURE	-40°C to 90°C (-40°F to 194°F)

CS 19 PIN-OUT


WIRING DIAGRAM



J1-J8 PIN-OUT

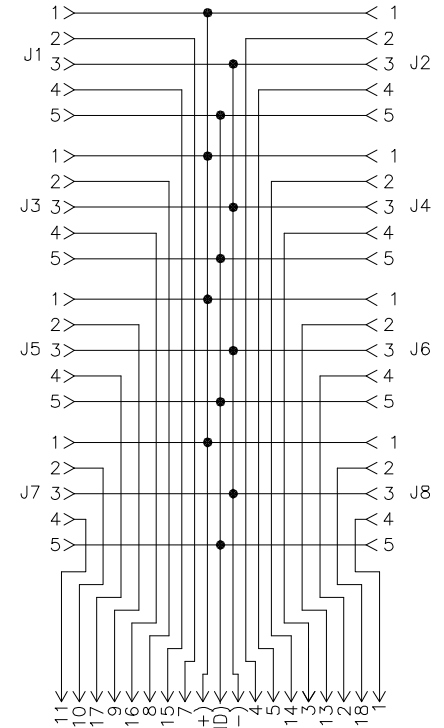

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS		3RD ANGLE PROJECTION				THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.				3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1.											
2.											
3.											
4.											
MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT		IK		DATE		11/11/98	
				APVD				SCALE		1=2	
FINISH		CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT MILLIMETER [INCH]		DESCRIPTION VBM 80.5-CS19		IDENTIFICATION NO. U0114-13		REV E	
DO NOT SCALE THIS DRAWING								FILE: U0114-13		SHEET 1 OF 1	

E	ADD CE-UKCA MARK TO CLICHE	RDS	04/29/22	500000004984
REV	DESCRIPTION	BY	DATE	ECO NO.