




MALE END VIEW



FEMALE END VIEW



WIRING DIAGRAM

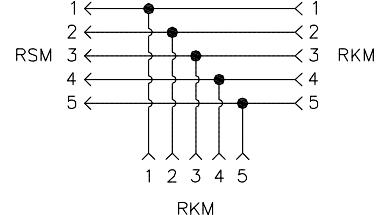


minifast DeviceNet™

minifast DeviceNet™

SPECIFICATIONS

| | |
|--------------------------------|----------------------------------|
| CONTACT CARRIER MATERIAL/COLOR | TPU/BLUE-CRAY |
| MOLDED HEAD MATERIAL/COLOR | TPU/BLUE-CRAY |
| CONTACT MATERIAL/PLATING | BRASS/GOLD |
| COUPLING NUT MATERIAL/PLATING | BRASS/NICKEL |
| RATED CURRENT [A] | 9.0 A |
| RATED VOLTAGE [V] | 250 V |
| TEMPERATURE RATING | +80°C |
| PROTECTION CLASS | MEETS NEMA 1,3,4,6P AND IEC IP67 |

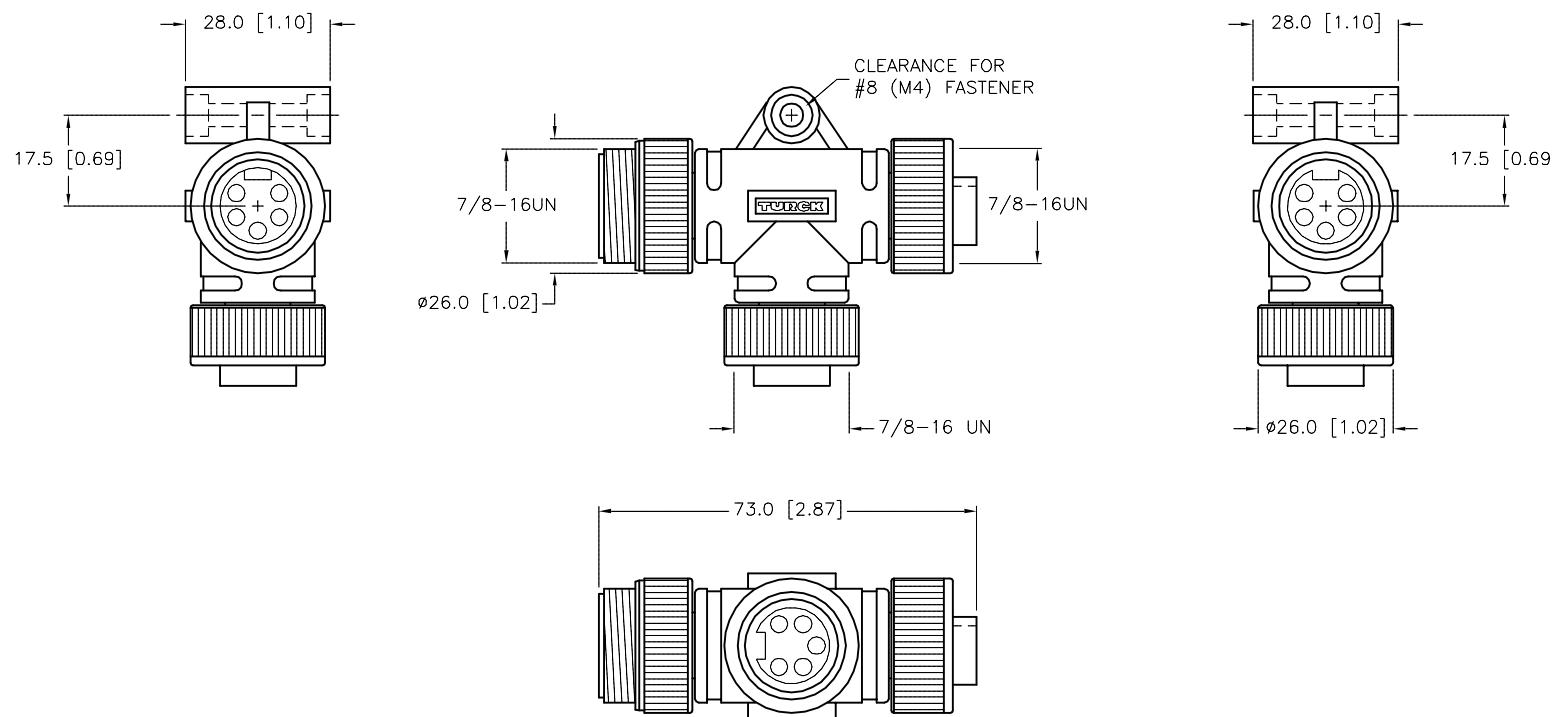

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

1. "KM" DESIGNATES KEYWAY OF DROP CONNECTOR FACES TOWARD THE MALE CONNECTOR.

| | | | | | | | | | |
|------------------------------------|--|---|--|--|--|--------------------|--|---|--|
| RELATED DOCUMENTS | | 3RD ANGLE PROJECTION | | THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED. | | TURCK INC | | 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com | |
| 1. 2. 3. 4. | | | | | | | | | |
| MATERIAL | | DRFT CBM | | DATE 10/02/00 | | DESCRIPTION | | RSM-2RKM 57-KM | |
| APVD | | SCALE 1=1.5 | | | | | | | |
| FINISH | | ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY | | UNIT OF MEASUREMENT | | IDENTIFICATION NO. | | REV | |
| CONTACT TURCK FOR MORE INFORMATION | | MILLIMETER [INCH] | | U0141-002 | | F | | | |
| DO NOT SCALE THIS DRAWING | | FILE: U0141-002 | | SHEET 1 OF 1 | | | | | |

F | UPDATED NOTES PER ECO | TV | 03/25/16 | 54141

REV | DESCRIPTION | BY | DATE | ECO NO.