

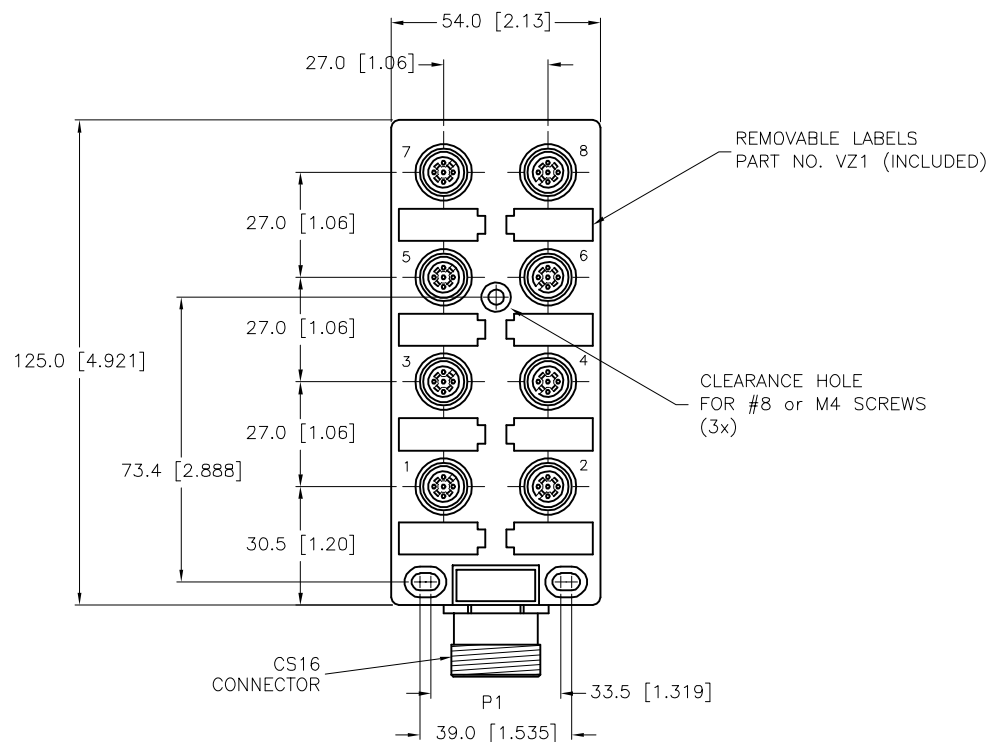


MALE END VIEW



SPECIFICATIONS

MATING CORDSET	CK-16-0 or CKA-16-14-*
HOUSING MATERIAL	NYLON
CONTACT CARRIER MATERIAL	TPU
CONTACT MATERIAL/PLATING	COPPER/GOLD
SEALING RING MATERIAL	VITON O-RING
RECEPTACLE MATERIAL/PLATING	BRASS/NICKEL
OPERATING VOLTAGE	10-48 VDC
MAXIMUM CURRENT	4 AMPS PER PORT, 7 AMPS PER SUPPLY
PROTECTION CLASS to DIN 40050	IP 67 ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATING TEMPERATURE	-40°C to 90°C (-40°F to 194°F)

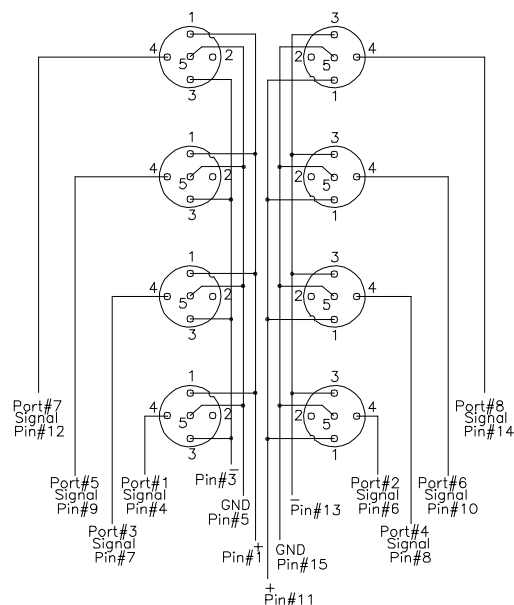


SOURCE DRAWING - FOR REFERENCE ONLY



CLOSURE CAPS
(INCLUDED)

NOTES: 1. HOUSING THICKNESS IS 33.0 mm.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION			THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.			3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
MATERIAL PA 6 GF 30	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT	RJP	DATE	1/3/96	DESCRIPTION VB 2X40-CS16		
FINISH		APVD		SCALE	1=2.0			
	CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT			IDENTIFICATION NO. U0173-24			REV E
MILLIMETER [INCH]								
		DO NOT SCALE THIS DRAWING			FILE: U0173-24			SHEET 1 OF 1