


# SPECIFICATIONS

HOUSING MATERIAL	DIE-CAST ALUMINUM ALLOY
HOUSING FINISH/COLOR	POWDER COAT/BLACK
RECEPTACLE HOUSING MAT'L/PLATING	BRASS/NICKEL
CONTACT CARRIERS MATERIAL	TPU
CONTACTS MATERIAL/PLATING	BRASS/GOLD
OPERATING VOLTAGE	300 V
OPERATING CURRENT	9.0 A PER CONDUCTOR
PROTECTION CLASS to DIN 40050	IP 67 - ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATING TEMPERATURE	-40°C to +70°C (-40°F to +158°F)

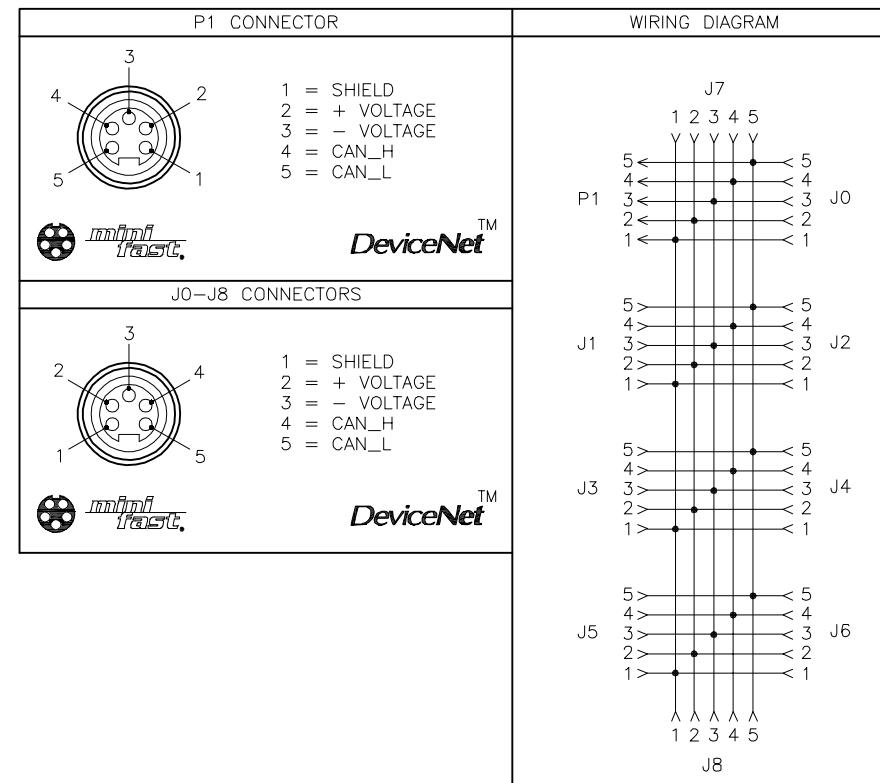

RELATED DOCUMENTS		3RD ANGLE PROJECTION		<div>THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.</div> <div>TURCK</div> <div>3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us</div>					
1. 2. 3. 4.									
MATERIAL		DRFT	CBM	DATE	03/20/97	DESCRIPTION  JBBS-57-M801			
ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		APVD		SCALE	1=2.0				
		UNIT OF MEASUREMENT				IDENTIFICATION NO.		REV	
		MILLIMETER [ INCH ]				U0206		K	
FINISH		CONTACT TURCK FOR MORE INFORMATION				DO NOT SCALE THIS DRAWING		FILE: U0206	SHEET 1 OF 1

K	ADD CE-UKCA MARK TO CLICHE	RDS	08/18/22	500000006082
REV	DESCRIPTION	BY	DATE	ECO. NO.