




SPECIFICATIONS									
CONTACT CARRIER MATERIAL	PBT OR NYLON								
CONTACT MATERIAL/PLATING	BRASS/GOLD								
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL								
GASKET	NEOPRENE								
RATED CURRENT [A]	8.0 A								
RATED VOLTAGE [V]	150 V								
MAX. CONDUCTORS SIZE	18 AWG								
TERMINATION METHOD	SOLDER								
TEMPERATURE	-40°C to +125°C (-40°F to +257°F)								
CABLE DIAMETERS	5mm (.197") to 12mm (.472)								

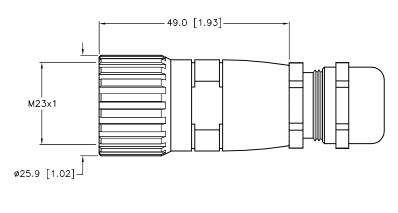





SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:					RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND TH PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION PROHIBITED.	s	RC	MINNEAPC 1-800 (763) (763)	CAMPUS DRIVE DLIS, MN 55441 0-544-7769 553-7300 553-0708 fax w.turck.us
1. USE TOOL PART NUMBER "CK-TOOL" TO AID WITH ASSEMBLY OF FIELD-WIREABLE				MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR	APVD M.B.	DATE 05/06/16 SCALE 1=1.0	DESCRIPTION	CS 16-0		
				FINISH	REFERENCE ONLY CONTACT TURCK FOR MORE	UNIT OF MEASUREMENT		IDENTIFICATION NO.		REV	
						MILLIMETER [INCH]		U	U0211	ІвІ	
B ADI) NOTES	RDS	10/09/20	76214	_	INFORMATION					
REV DES	CRIPTION	BY	DATE	ECO NO.			DO NOT SCA	E THIS DRAWING	FILE: U0211		SHEET 1 OF 1