

	MALE END VIEW	ļ
	4	
	1 3	
	2	
6	ewro fast,	

_						
	SPECIFICATIONS					
	CONTACT CARRIER MATERIAL	NYLON or TPU				
	CONTACT MATERIAL/PLATING	BRASS/GOLD				
	HOUSING MATERIAL/PLATING	BRASS/NICKEL				
	RATED CURRENT [A]	4.0 A				
	RATED VOLTAGE [V]	150 V				
	TEMPERATURE RANGE	-30°C to +80°C (-22°F to +176°F)				
	PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67				
	GASKET MATERIAL	NITRILE				
	ISOLATOR MATERIAL	NYLON				

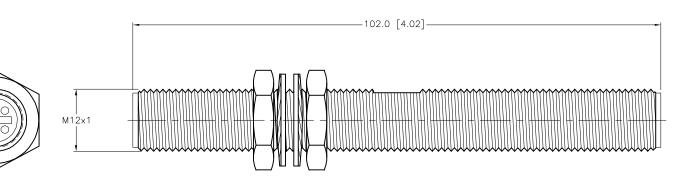



SOURCE DRAWING - FOR REFERENCE ONLY

								OSCINCE DIAWING TOTTIEF ENERGE SHET
					RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	WRITTEN PERMISSION IS PROHIBITED.	3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us
					MATERIAL SEE SPECIFICATIONS FINISH	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	APVD JBJ DATE 11/19 SCALE 1=. UNIT OF MEASUREMENT	DESCRIPTION FS FS 4.4-0.1/M12 IDENTIFICATION NO. REV
_	UPDATE VOLTAGE RATING AND PROTECTION CLASS	RDS	07/28/11	35766	SEE SPECIFICATIONS	CONTACT TURCK FOR MORE INFORMATION	MILLIMETER [INCH]	
REV	DESCRIPTION	BY	DATE	ECO NO.			DO NOT SCALE THIS DRAWING	FILE: U0870-84 SHEET 1 OF 1