



FEMALE ENDVIEW



CONNECTOR END VIEW



54.0 [2.13]

27.0 [1.06]

27.0 [1.06] TYPICAL

98.0 [3.86]

73.0 [2.87]

30.5 [1.20]

6.0 [0.24] TYP.

39.0 [1.54]

33.5 [1.32]

1 1/8-16UN


REMOVABLE LABEL
PART # VZ1 (INCLUDED)
7 PLS

POWER LED
(GREEN)


SIGNAL LED
(YELLOW)
6 PLS

CLEARANCE HOLE
FOR #8 SCREW
3 PLS

33.0 [1.30]



WIRING DIAGRAM

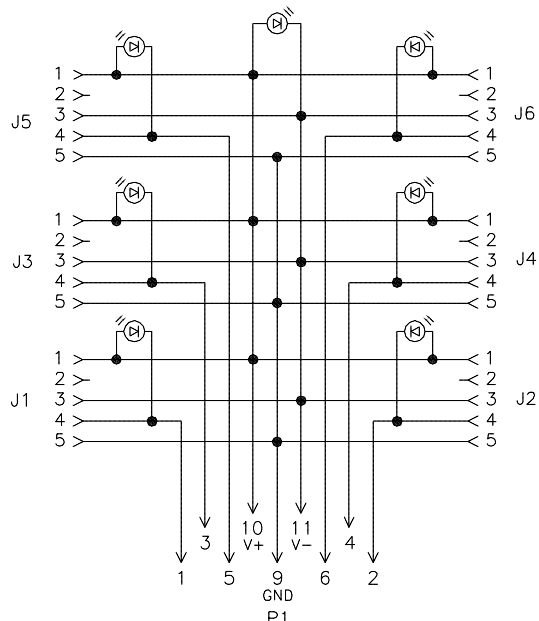

WIRING DIAGRAM

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

1. "/CS10406" DESIGNATES SPECIAL WIRED HOME RUN CONNECTOR.

CLOSURE CAPS
(2 INCLUDED)



D	UPDATED CLOSURE CAPS	TV	09/17/15	48811
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS

1.
2.
3.
4.


MATERIAL

SEE SPECIFICATIONS

FINISH

SEE SPECIFICATIONS

3RD ANGLE PROJECTION



ALL DIMENSIONS
DISPLAYED ON THIS
DRAWING ARE FOR
REFERENCE ONLY

CONTACT TURCK
FOR MORE
INFORMATION

THIS DRAWING IS
CONFIDENTIAL AND THE
PROPERTY OF TURCK
INC. USE OF THIS
DOCUMENT WITHOUT
WRITTEN PERMISSION IS
PROHIBITED.

DRFT

JB

DATE

01/25/01

APVD

DF

SCALE

1=2.0

UNIT OF MEASUREMENT

MILLIMETER [INCH]

DO NOT SCALE THIS DRAWING

TURCK INC

High Technology Sensors and Automation Controls

3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1-800-544-7769
(763) 553-7300
(763) 553-0708 fax
turck.com

DESCRIPTION

VB 60-N7X7-RRRSF 120/CS10406

IDENTIFICATION NO.

U0877-78

REV

D

FILE: U0877-78

SHEET 1 OF 1