



FEMALE END VIEW



SPECIFICATIONS


HOUSING MATERIAL/COLOR	GLASS FILLED NYLON/BLACK
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	ANODIZED ALUMINUM
CAP MATERIAL/PLATING	BRASS/NICKEL
GASKET MATERIAL	NITRILE
O-RING MATERIAL	NITRILE
LANYARD MATERIAL	STAINLESS STEEL/NYLON COATED
RATED CURRENT [A]	9.0 A
RATED VOLTAGE [V]	600 V
MAXIMUM WIRE SIZE	16 AWG
TERMINATION METHOD	SCREW TERMINAL
CABLE GRIP RANGE	PG 9 = 6-8mm, PG 13.5 = 10-12mm
TEMPERATURE RATING	-25°C to +90°C (-13°F to +194°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP 67

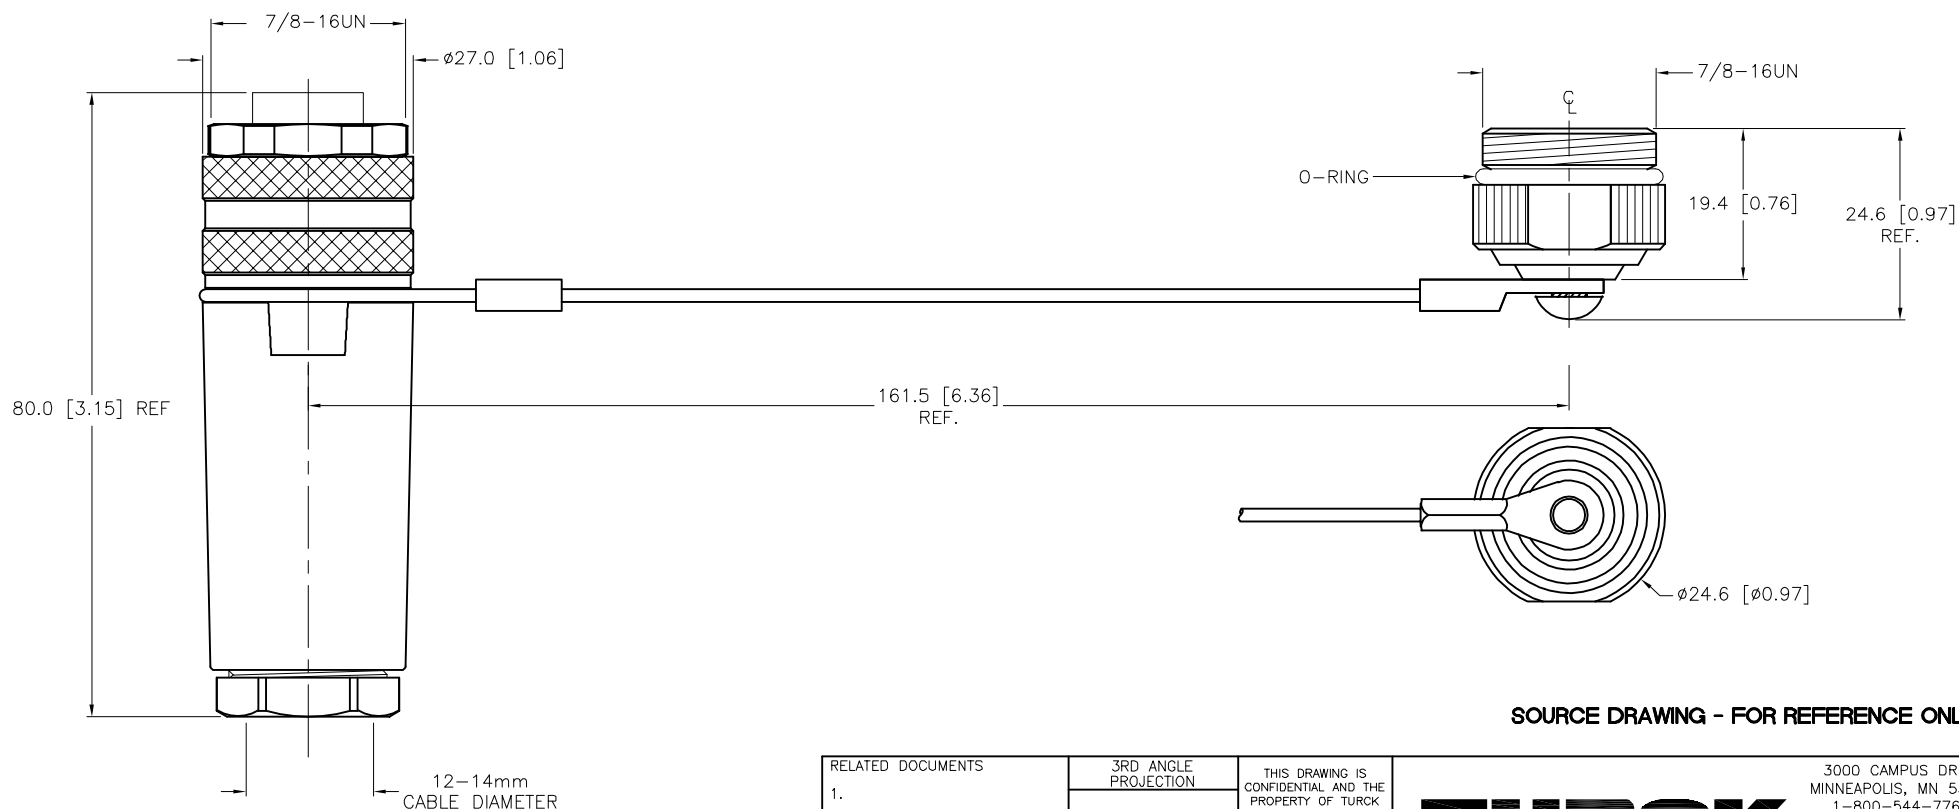

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

1. "/CS10359" DESIGNATES FIELD WIRABLE WITH CABLE CLOSURE CAP.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED. TURCK 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us					
							
MATERIAL SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT	JB	DATE	02/27/02	DESCRIPTION B 4151-0/16/CS10359	
		APVD		SCALE	1=1.0		
		UNIT OF MEASUREMENT MILLIMETER [INCH]					
FINISH SEE SPECIFICATIONS	CONTACT TURCK FOR MORE INFORMATION	DO NOT SCALE THIS DRAWING				IDENTIFICATION NO.	REV
						U0878-09	D
						FILE: U0878-09	SHEET 1 OF 1

D	UPDATE TEMPERATURE RATING	NF	04/02/24	79995
REV	DESCRIPTION	BY	DATE	ECO NO.