



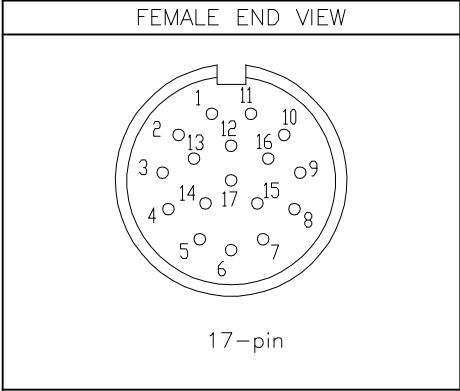

SPECIFICATIONS	
CONTACT CARRIER MATERIAL/COLOR	PBT OR NYLON/GRAY
CONTACT MATERIAL/PLATING	CuZn/GOLD
COUPLING NUT MATERIAL/PLATING	CuZn/NICKEL
GASKET	PERBUNAN OR FLUOR RUBBER (FPM)
RATED CURRENT [A]	8.0 A
RATED VOLTAGE [V]	150 V
MAX. CONDUCTORS SIZE	17 AWG MAX
TERMINATION METHOD	SOLDER
TEMPERATURE	−40°C to 125°C (−40°F to 257°F)
PROTECTION CLASS	IEC IP 65
CABLE DIAMETERS	5mm (.197") TO 14mm (.551")

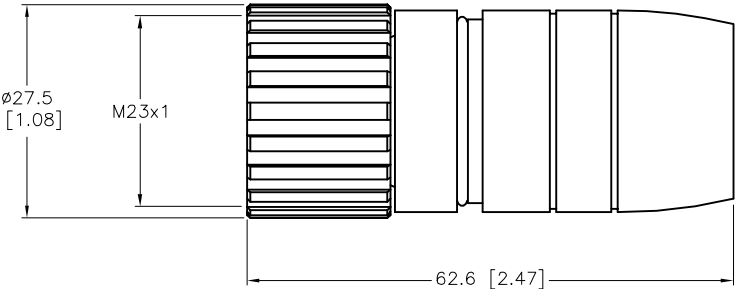

SOURCE DRAWING - FOR REFERENCE ONLY

					RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us										
					1.																
					2.																
					3.																
					4.																
					MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT		NF		DATE 06/20/18		DESCRIPTION CKS 17-0						
					FINISH				APVD				SCALE 1 = 1.0								
									UNIT OF MEASUREMENT MILLIMETER [INCH]				IDENTIFICATION NO. U0886-91				REV A				
A					DRAWING RELEASE					NF		02/22/19		68762		DO NOT SCALE THIS DRAWING		FILE: U0886-91		SHEET 1 OF 1	
REV					DESCRIPTION					BY		DATE		ECO NO.							