





FEMALE END VIEW

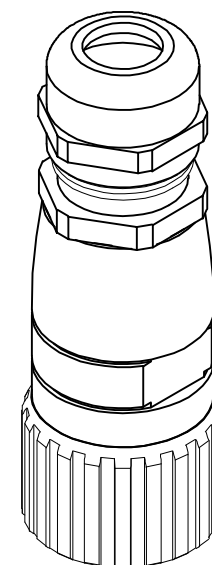

SPECIFICATIONS


CONTACT CARRIER MATERIAL	PBT OR NYLON
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
GASKET	PERBUNAN OR FLUOR RUBBER
RATED CURRENT [A]	8.0 A
RATED VOLTAGE [V]	300 V
MAX. CONDUCTORS SIZE	12/18 AWG
TERMINATION METHOD	SOLDER
TEMPERATURE	-40°C to 125°C (-40°F to 257°F)
PROTECTION CLASS	IEC IP 65
CABLE GRIP RANGE	4mm (.157") TO 10mm (.394")

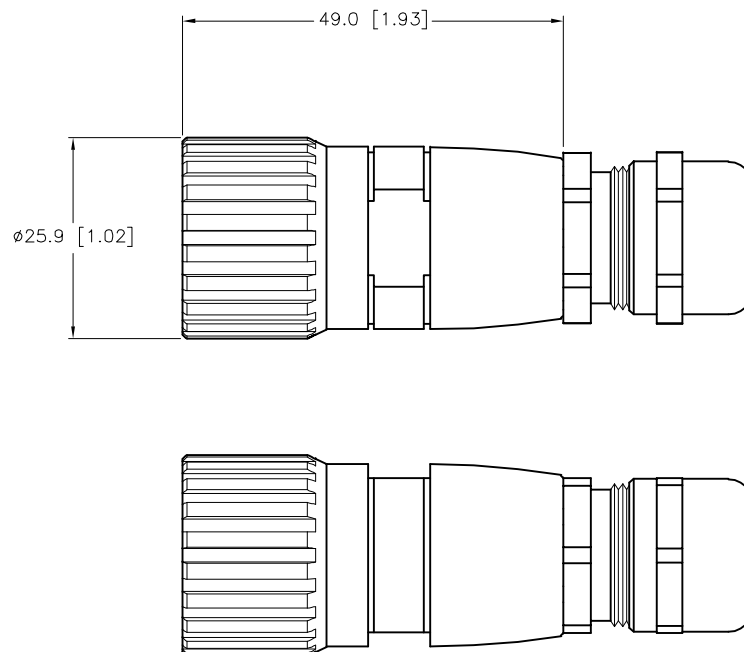

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

1. USE TOOL PART NUMBER "CK-TOOL" TO AID WITH ASSEMBLY OF FIELD WIREABLE.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.			3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us				
								TURCK	
	MATERIAL	DRFT	NF	DATE	10/07/20	DESCRIPTION CKS 12-0			
			APVD		SCALE		1=1.0		
FINISH	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT MILLIMETER [INCH]			IDENTIFICATION NO. U0886-92		REV A		
		DO NOT SCALE THIS DRAWING			FILE: U0886-92		SHEET 1 OF 1		

A	DRAWING RELEASE	NF	10/07/20	
REV	DESCRIPTION	BY	DATE	ECO. NO.