

KEYWAY MAY BE AT ANY POSITON




CLOSURE CAPS  
(2 INCLUDED)

NOTES:

1. CLEARANCE HOLE FOR 1/4-20 MOUNTING SCREWS (2 NOT INCLUDED).
2. "/CS10485" DESIGNATES PIN 3 CONNECTED TO CASE GROUND.

C	UPDATED CLOSURE CAPS	TV	09/17/15	48811
REV	DESCRIPTION	BY	DATE	ECO NO.

SPECIFICATIONS	
CABLE DATA	
MATING PLUG CABLE	CKM 12-7-* (*=CABLE LENGTH IN METERS)
MATERIAL	
HOUSING	DIE-CAST ALUMINUM ALLOY
HOUSING FINISH/COLOR	POWDER COAT/BLACK
RECEPTACLE	NICKEL-PLATED BRASS
CONTACT CARRIERS/COLOR	NYLON OR PBT/WHITE (P1), TPU/BLK (J1-J4)
CONTACTS	GOLD-PLATED BRASS
SEALING RING	VITON O-RING
ELECTRICAL DATA	
OPERATING VOLTAGE	10-48 V DC
OPERATING CURRENT	4.0 AMPS PER PORT, 8.0 AMPS TOTAL
SPACINGS	to VDE 0110 GROUP C
MECHANICAL DATA	
PROTECTION CLASS to DIN 40050	IP 67 - ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATING TEMPERATURE	-30°C to +80°C (-25°F to +176°F)

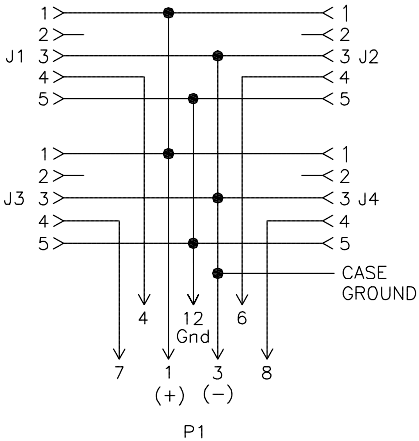

WIRING DIAGRAM

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
1. 2. 3. 4.				DRFT RDS		DATE 04/24/02	
MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		APVD		SCALE 1=2.0	
FINISH		CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT		DESCRIPTION	
SEE SPECIFICATIONS		SEE SPECIFICATIONS		MILLIMETER [ INCH ]		VBM 40-CS12/CS10485	
SEE SPECIFICATIONS		DO NOT SCALE THIS DRAWING		IDENTIFICATION NO.		REV	
				U0888-47		C	
				FILE: U0888-47		SHEET 1 OF 1	