
MALE END VIEW	FEMALE END VIEW	WIRING DIAGRAM		SPECIFICATIONS			
		_	4	CONTACT CARRIER MATERIAL	NYLON OR TPU		
4 I	4			MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW		
			2 1	CONTACT MATERIAL/PLATING	BRASS/GOLD		
1 6 3	3 1			COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL		
		2 ←	T [	RATED CURRENT [A]	4.0 A		
		P1 3 ←	1 — < 1 J2 J2 J2 — < 3 — < 4	RATED VOLTAGE [V]	250 V		
2	2			TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)		
<u>euro</u>	<u>euro</u>			PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67		
	uast.						

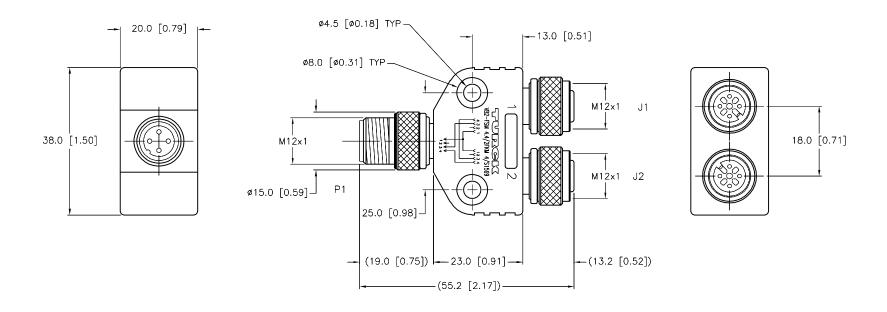

## SOURCE DRAWING - FOR REFERENCE ONLY

					1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		JRCK 1	00 CAMPUS EAPOLIS, M -800-544- 763) 553- 763) 553-0 www.turck.	N 55441 -7769 7300 0708 fax
NOTES: 1. "/S1569" DESIGNATES SERIES WIRED FOR "AND" FUNCTION, NPN SIGNALS.				MATERIAL		DRFT   GC		→ VB2-FSM 4.4/2FKM 4/S1569			
								IDENTIFICATION NO.  U0891-27		REV F	
Ε	UPDATE MALE COUPLING NUT	NF	04/23/18	56903		INFORMATION					_
REV	DESCRIPTION	BY	DATE	ECO NO.			DO NOT SCALE	THIS DRAWING	FILE: U0891-27	SHEET	Г 1 OF 1