
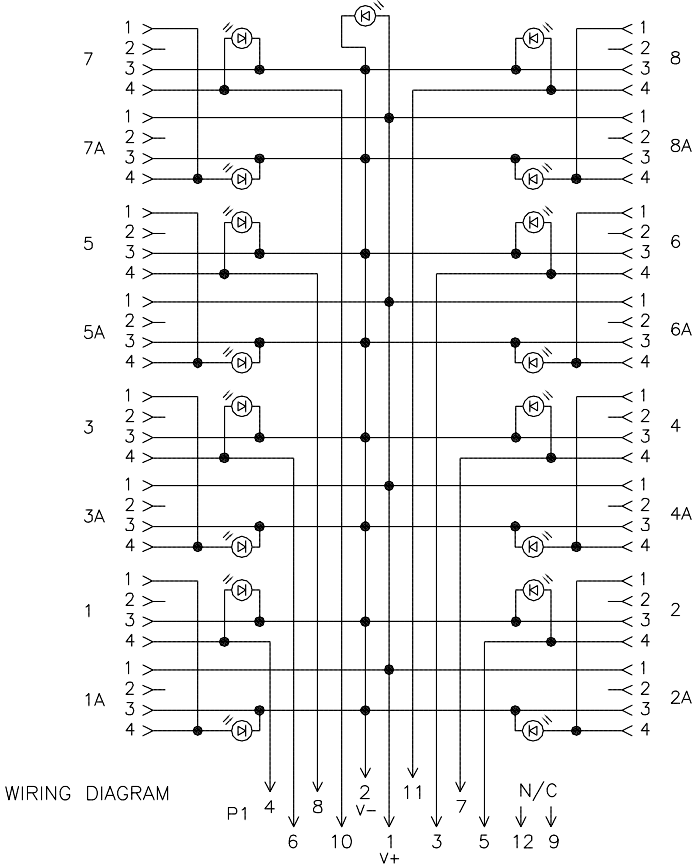


SPECIFICATIONS	
HOUSING MATERIAL	NYLON
RECEPTACLE HOUSING MAT'L/PLATING	BRASS/NICKEL
CONTACT CARRIER MATERIAL	NYLON (1,1A-8,8A), TPU (P1)
CONTACT MATERIAL/PLATING	BRASS/GOLD
OPERATING VOLTAGE	10-48 VDC
OPERATING CURRENT	4.0 AMPS PER CONNECTOR, 8 AMPS MAX
LED FUNCTION	FOR PNP SENSOR OUTPUT
PROTECTION CLASS to DIN 40050	IP 67 - ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATING TEMPERATURE	-30°C to +80°C (-22°F to +176°F)

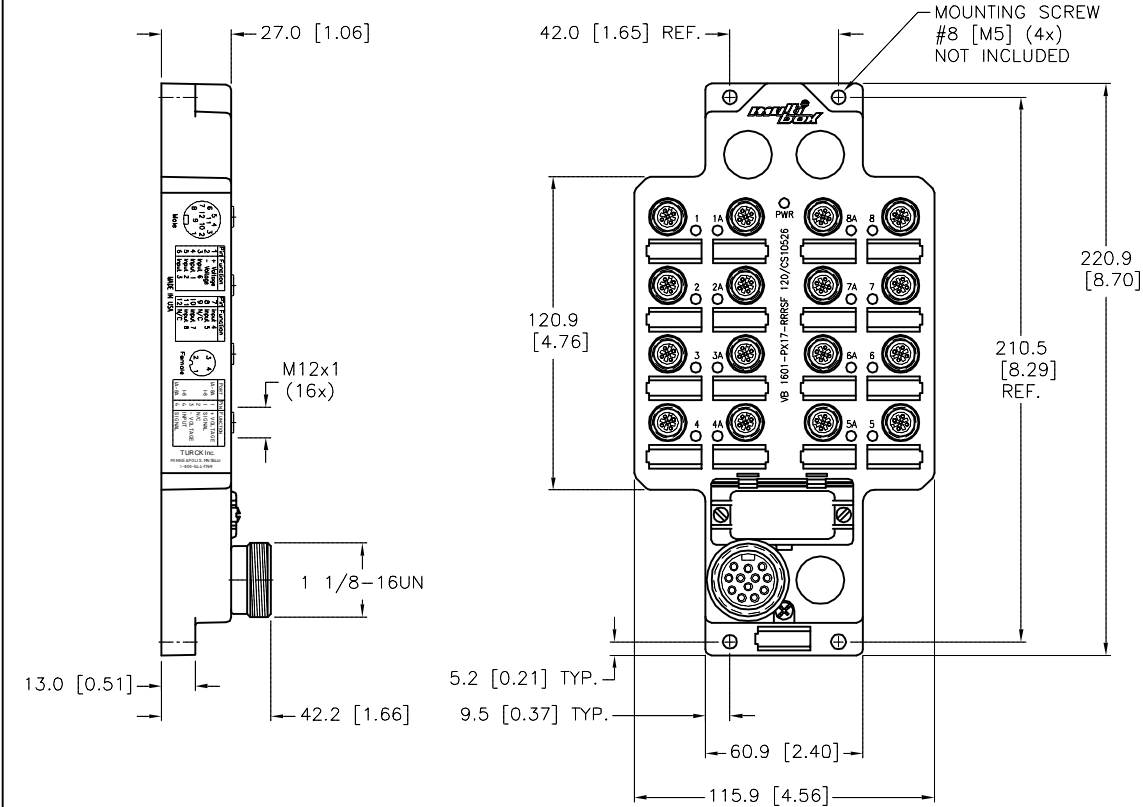

WIRING DIAGRAM

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES: 1. "/CS10526" DESIGNATES SPECIAL 16-PORT JUNCTION BOX .				RELATED DOCUMENTS 1. 2. 3. 4.		3RD ANGLE PROJECTION 		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
				MATERIAL SEE SPECIFICATIONS		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT JBJ DATE 07/08/02 APVD T.S. SCALE 1=3.0		DESCRIPTION VB 1601-PX17-RRRSF 120/CS10526	
				FINISH SEE SPECIFICATIONS		CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT MILLIMETER [ INCH ]		IDENTIFICATION NO. U0893-80	
								DO NOT SCALE THIS DRAWING		REV D	
D UPDATED CLOSURE CAPS				TV 09/17/15 48811						FILE: U0893-80	
REV DESCRIPTION				BY DATE ECO NO.						SHEET 1 OF 1	