
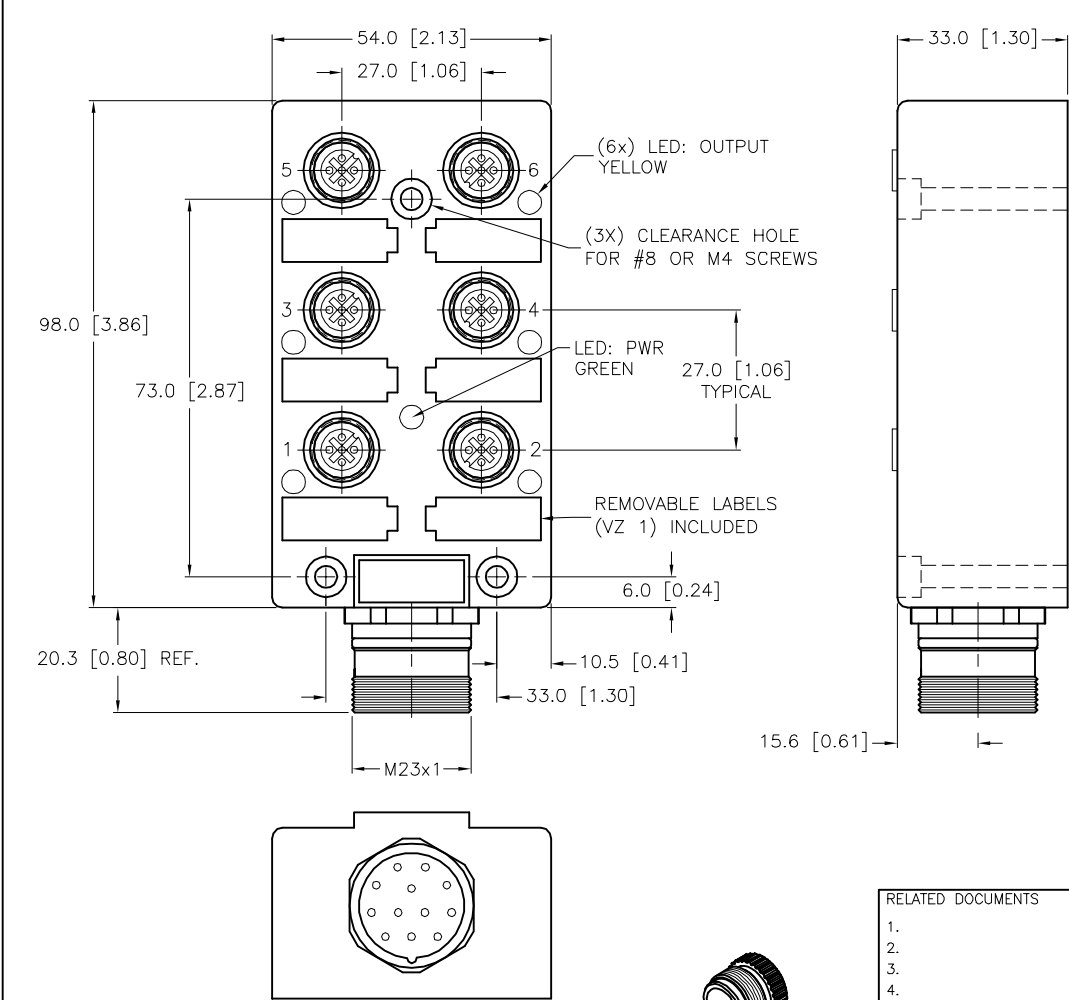


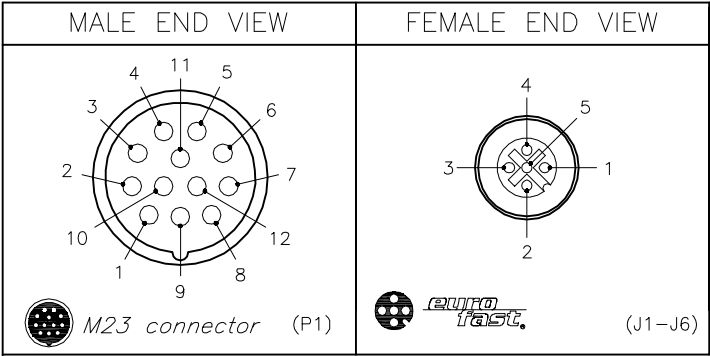


NOTES:

1. "/CS10547" DESIGNATES CS12 CONNECTOR KEYWAY AT THE 6'O'CLOCK POSITION.


CLOSURE CAPS (2 INCLUDED)

C	UPDATED CLOSURE CAPS	TV	09/17/15	48811
REV	DESCRIPTION	BY	DATE	ECO. NO.

SPECIFICATIONS	
MATERIAL	
HOUSING MATERIAL/COLOR	NYLON/YELLOW
RECEPTACLE MATERIAL/PLATING	BRASS/NICKEL
CONTACT CARRIER MATERIAL/COLOR	NYLON OR TPU/BLACK
CONTACT MATERIAL/PLATING	BRASS/GOLD
SEALING RING	VITON O-RING
ELECTRICAL DATA	
OPERATING VOLTAGE	10-48 VDC
OPERATING CURRENT	4.0 AMPS PER PORT, 10 AMPS TOTAL
LED FUNCTION	for PNP SENSOR OUTPUT
MECHANICAL DATA	
PROTECTION CLASS to DIN 40050	IP 67 - ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATING TEMPERATURE	-30°C to +80°C (-25°F to +176°F)

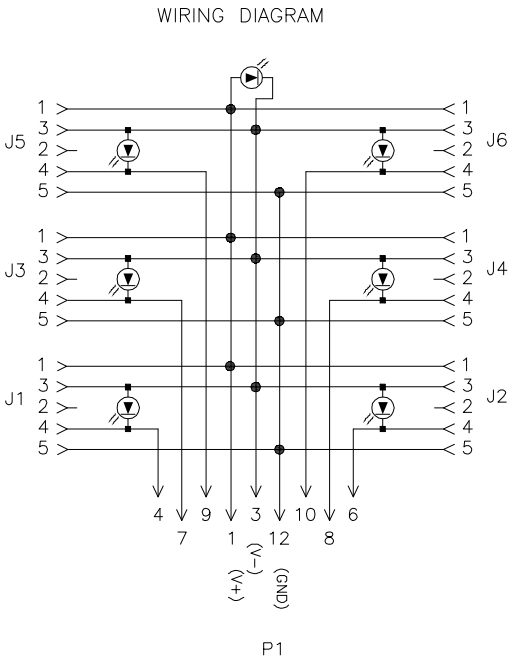

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us			
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT	RWC	DATE	08/11/08	DESCRIPTION VB 60-P7X7-CS12/CS10547	
SEE SPECIFICATIONS		APVD		SCALE	1 = 1.5		
FINISH		UNIT OF MEASUREMENT			IDENTIFICATION NO.		REV
SEE SPECIFICATIONS		CONTACT TURCK FOR MORE INFORMATION			U0898-04		C
			DO NOT SCALE THIS DRAWING			FILE: U0898-04	SHEET 1 OF 1