


SPECIFICATIONS				
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW			
CONTACT CARRIER MATERIAL	NYLON OR TPU			
CONTACT MATERIAL/PLATING	BRASS/GOLD			
HOUSING/COUPLING NUT MATERIAL	BRASS/NICKEL			
RATED CURRENT [A]	4.0 A			
RATED VOLTAGE [V]	125 VAC/VDC			
OUTER JACKET MATERIAL/COLOR	TPU/BLACK			
CONDUCTOR INSULATION MATERIAL	PVC			
NUMBER OF CONDUCTORS [AWG]	3x24 AWG			
TEMPERATURE RATING	-40°C to +90°C (-40°F to +194°F)			
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67			

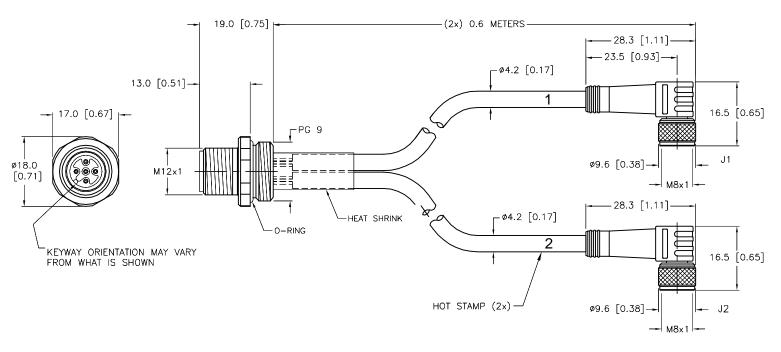

CABLE LENGTH	TOLERANCE *				
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER				
STRIP LENGTH	TOLERANCE *				
0-7mm	±0.5mm				
8-29mm	±1.0mm				
30-49mm	±2.0mm				
50-69mm	±3.0mm				
70-100mm	±4.0mm				
OVER 100mm	VER 100mm ±5.0mm				
* UNILESS OTHERWISE SPECIFIED					

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:
1. "/S90" INDICATES THERMOPLASTIC POLYURETHANE (TPU) CABLE JACKET.

2.	"/CS10571"	DES	SIGNATES	WIRING	OF	DUAL	CABLES	INTO	RECEPTACLE.	
NO	LOCKNUT (ON R	ECEPTACL	.E.						

О	ADD HEAT SHRINK TO BACK OF RECEPTACLE	RDS	02/17/20	75661
REV	DESCRIPTION	BY	DATE	ECO NO.

	PROJECTION				
1. 2. 3. 4.	⊕ □				
MATERIAL					
SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY				
FINISH	CONTACT TURCK				
SEE SPECIFICATIONS	FOR MORE INFORMATION				

3RD ANGLE

RELATED DOCUMENTS

THIS DRAWING IS
CONFIDENTIAL AND THE
PROPERTY OF TURCK
INC. USE OF THIS
DOCUMENT WITHOUT
WRITTEN PERMISSION IS
PROHIBITED.

MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us

3000 CAMPUS DRIVE

DRFT RDS DATE 11/20/02 DESCRIPTION FS 4.5-2PKW 3M-0.6/0.6/S90/CS10571

UNIT OF MEASUREMENT

MILLIMETER [INCH]

DO NOT SCALE THIS DRAWING

FILE: U0906-66

SHEET 1 OF 1