



FEMALE END VIEW



SPECIFICATIONS

CONTACT CARRIER MATERIAL	NYLON or PBT
CONTACT MATERIAL/PLATING	BRASS/GOLD
CONNECTOR HOUSING MATERIAL/PLATING	BRASS/NICKEL
GASKET	RUBBER (NBR or FPM)
RATED CURRENT [A]	5.0 A
RATED VOLTAGE [V]	150 V
MAX. CONDUCTORS SIZE	26/22 AWG
TERMINATION METHOD	SOLDER
TEMPERATURE	-40°C TO +105°C (-40°F TO +221°F)
PROTECTION CLASS	IEC IP67
CABLE DIAMETERS	2mm TO 14.5mm (.571")

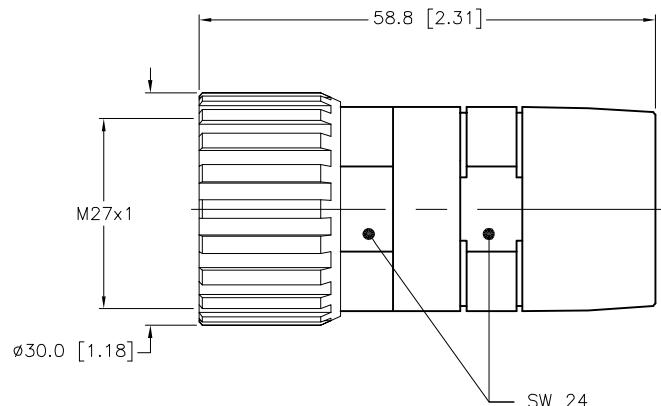

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1.				DRFT	DD	DATE	01/13/04	DESCRIPTION	DK 26-0
2.				APVD		SCALE	1=1.0		
3.						UNIT OF MEASUREMENT			
4.						MILLIMETER [INCH]		IDENTIFICATION NO.	
SEE SPECIFICATIONS		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		CONTACT TURCK FOR MORE INFORMATION		DO NOT SCALE THIS DRAWING		U0906-96	REV A
FINISH		SEE SPECIFICATIONS				FILE: U0906-96		SHEET 1 OF 1	

A DRAWING RELEASE

DD 01/19/04

REV DESCRIPTION

BY DATE ECO NO.