




SPECIFICATIONS									
CONTACT CARRIER MATERIAL	TPU								
CONTACT MATERIAL/PLATING	BRASS/GOLD								
HOUSING MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED								
RATED CURRENT [A]	9.0 A								
RATED VOLTAGE [V]	600 V								
TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)								
PROTECTION CLASS	MEETS NEMA 1,3,4 AND IEC IP67								
ACCOMODATES WALL THICKNESS	.040" (1.0 mm) to .875" (22.2 mm)								
GASKET MATERIAL	NITRILE								



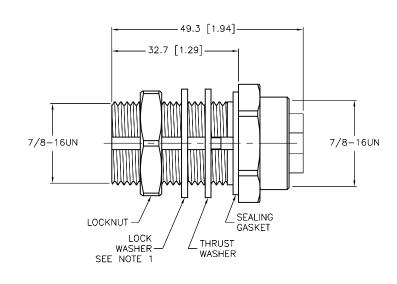



## SOURCE DRAWING - FOR REFERENCE ONLY

			RELATED DOCUMENTS  1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		IRCK	3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us				
NOTE(S):  1. LOCK WASHER TO BE INSTALLED ON THREADS AS SHOWN.					SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT         RDS         DATE 01/17/06           APVD         SCALE 1=1.0           UNIT OF MEASUREMENT		$\longrightarrow$ RSEV RKEV 50/22 I			
C DRAWING PROCESSED AS PART OF ECO 38872 KMY 05/10/12 38872				FINISH SEE SPECIFICATIONS	CONTACT TURCK FOR MORE INFORMATION	MILLIMETI	ER [INCH]		U0912-41		C	
REV	DESCRIPTION	BY	DATE	ECO NO.	01 2011 1071110110		DO NOT SCALE	THIS DRAWING	FILE: U0912-41		SHEET	1 OF 1