


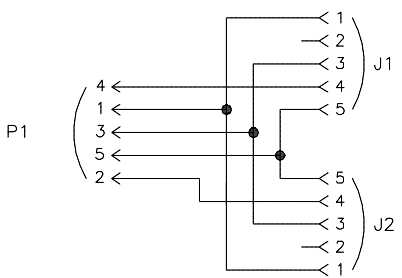
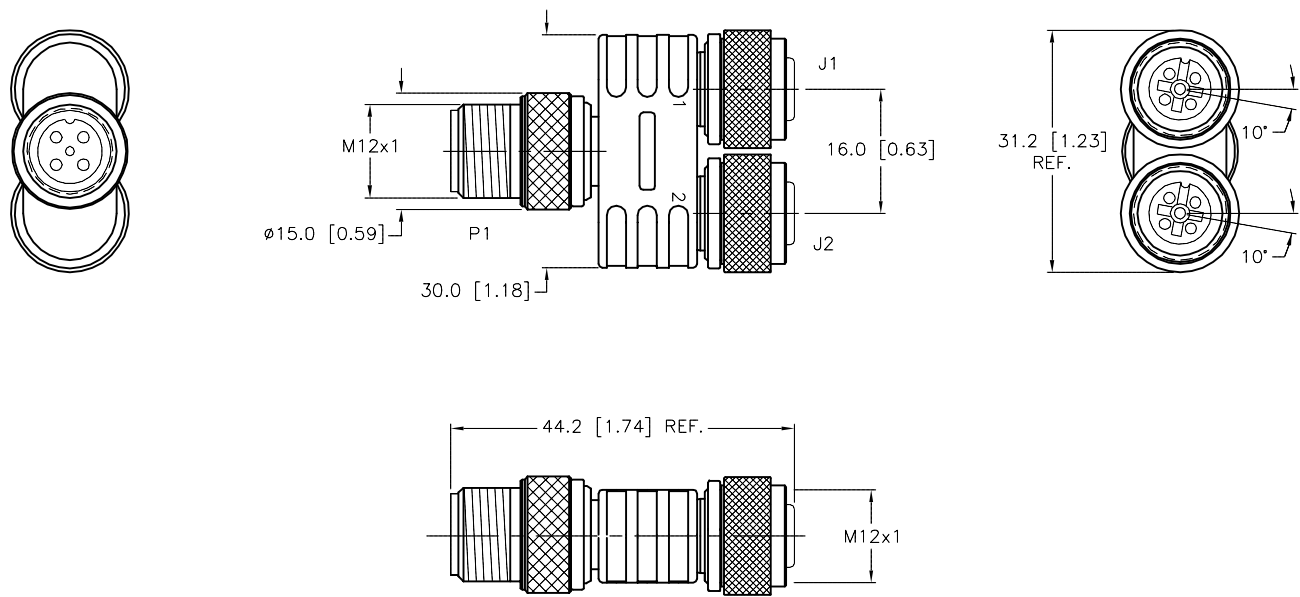


MALE END VIEW		FEMALE END VIEW	WIRING DIAGRAM	SPECIFICATIONS	
				CONTACT CARRIER MATERIAL	NYLON OR TPU
				MOLDED BODY MATERIAL/COLOR	TPU/GRAY
				CONTACT MATERIAL/PLATING	BRASS/BOLD
				COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
				RATED CURRENT [A]	4.0 A
				RATED VOLTAGE [V]	30 VAC/36 VDC
				NUMBER OF CONDUCTORS [AWG]	PRINTED CIRCUIT PINS
				TEMPERATURE RATING	-30°C to +80°C (-22°F to +176°F)
				PROTECTION CLASS	MEETS IEC IP67
				SPACINGS	to VDE 0110 GROUP C



SOURCE DRAWING - FOR REFERENCE ONLY

NOTES: 1. "/S1063" DESIGNATES KEYWAY CHANGE TO WORK WITH OLD STYLE VB 40.5 AND VB 80.5 MULTIBOXES, MOLD BODY COLOR TO BE GREY.	RELATED DOCUMENTS				3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us					
	1. 2. 3. 4.													
	MATERIAL				DRFT JBJ						DATE 07/08/03		DESCRIPTION YB2-FSM 4.5-2FKM 4.5/S1063	
	SEE SPECIFICATIONS				APVD						SCALE 1 = 1.0			
FINISH				ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO.		REV				
SEE SPECIFICATIONS								U0918-61		D				
D	UPDATE PROTECTION CLASS SPECIFICATION			KMY	07/03/13	42662								
REV	DESCRIPTION			BY	DATE	ECO NO.								