

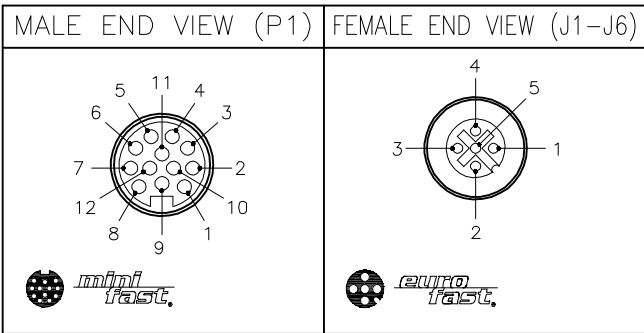


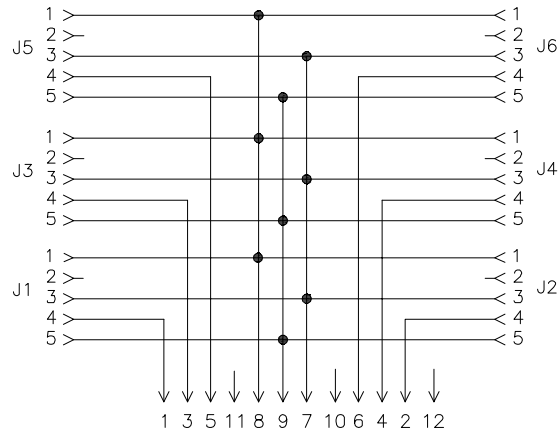

SPECIFICATIONS	
HOUSING MATERIAL/COLOR	NYLON/YELLOW
RECEPTACLE MATERIAL/PLATING	BRASS/NICKEL
CONTACT CARRIER MATERIAL	NYLON (J1-J6), TPU (P1)
CONTACTS MATERIAL/PLATING	BRASS/GOLD
SEALING RING MATERIAL	VITON O-RING
OPERATING VOLTAGE	10-48 VDC
OPERATING CURRENT	4 AMPS PER PORT, 9 AMPS TOTAL
SPACINGS	to VDE 0110 GROUP C (EUROFAST)
PROTECTION CLASS to DIN 40050	IP 67 - ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATING TEMPERATURE	-30°C to +80°C (-25°F to +176°F)

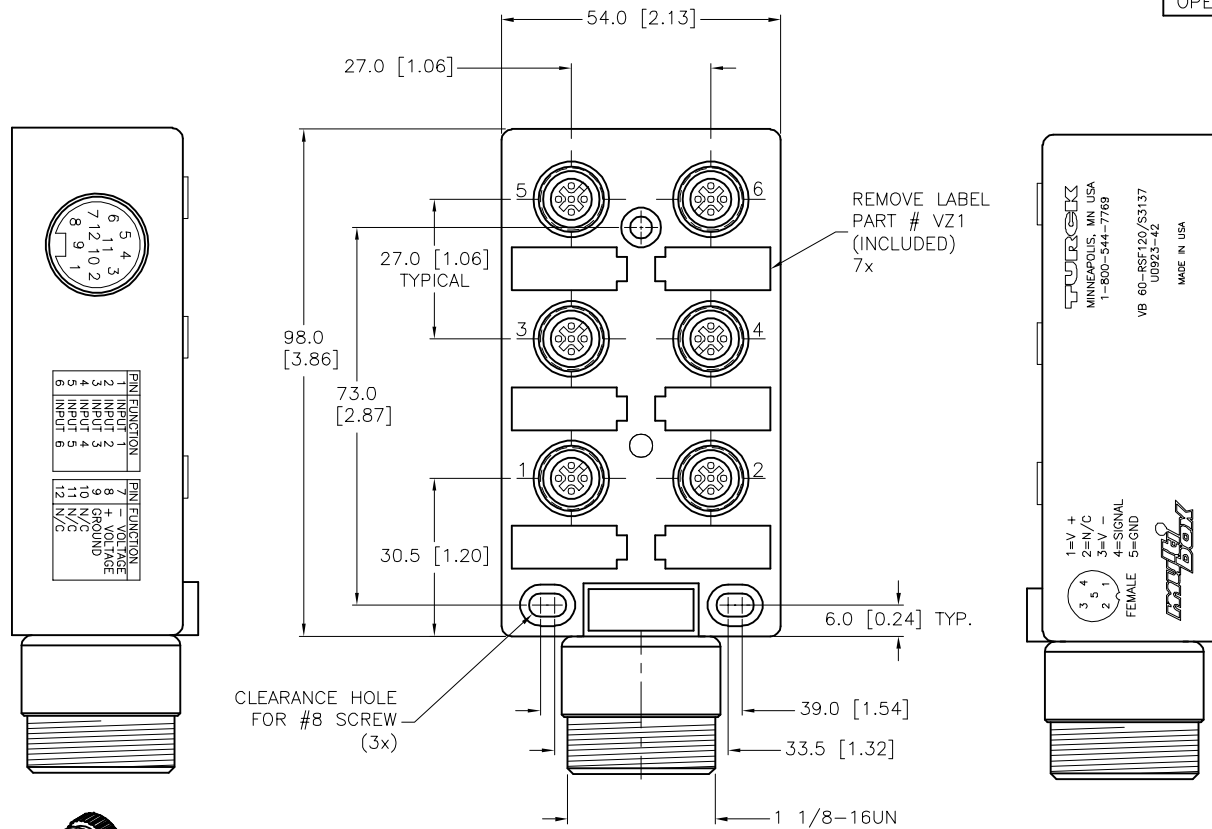

SOURCE DRAWING - FOR REFERENCE ONLY

CLOSURE CAPS
2x (INCLUDED)

NOTES:
1. "/S3137" DESIGNATES NON-STANDARD WIRING ON MINI HOMERUN CONNECTOR.

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DOCUMENT IS PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK INC High Technology Sensors and Automation Controls				3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (612) 553-7300 (612) 553-0708 fax www.turck.com					
1. 2. 3. 4.															
MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT PJ		DATE 06/09/05		DESCRIPTION VB 60-RSF120/S3137							
SEE SPECIFICATIONS				APVD PLJ		SCALE 1=1.5									
FINISH				CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT MILLIMETER [INCH]				IDENTIFICATION NO. U0923-42				REV F	
SEE SPECIFICATIONS		DO NOT SCALE THIS DRAWING				FILE: U0923-42				SHEET 1 OF 1					