



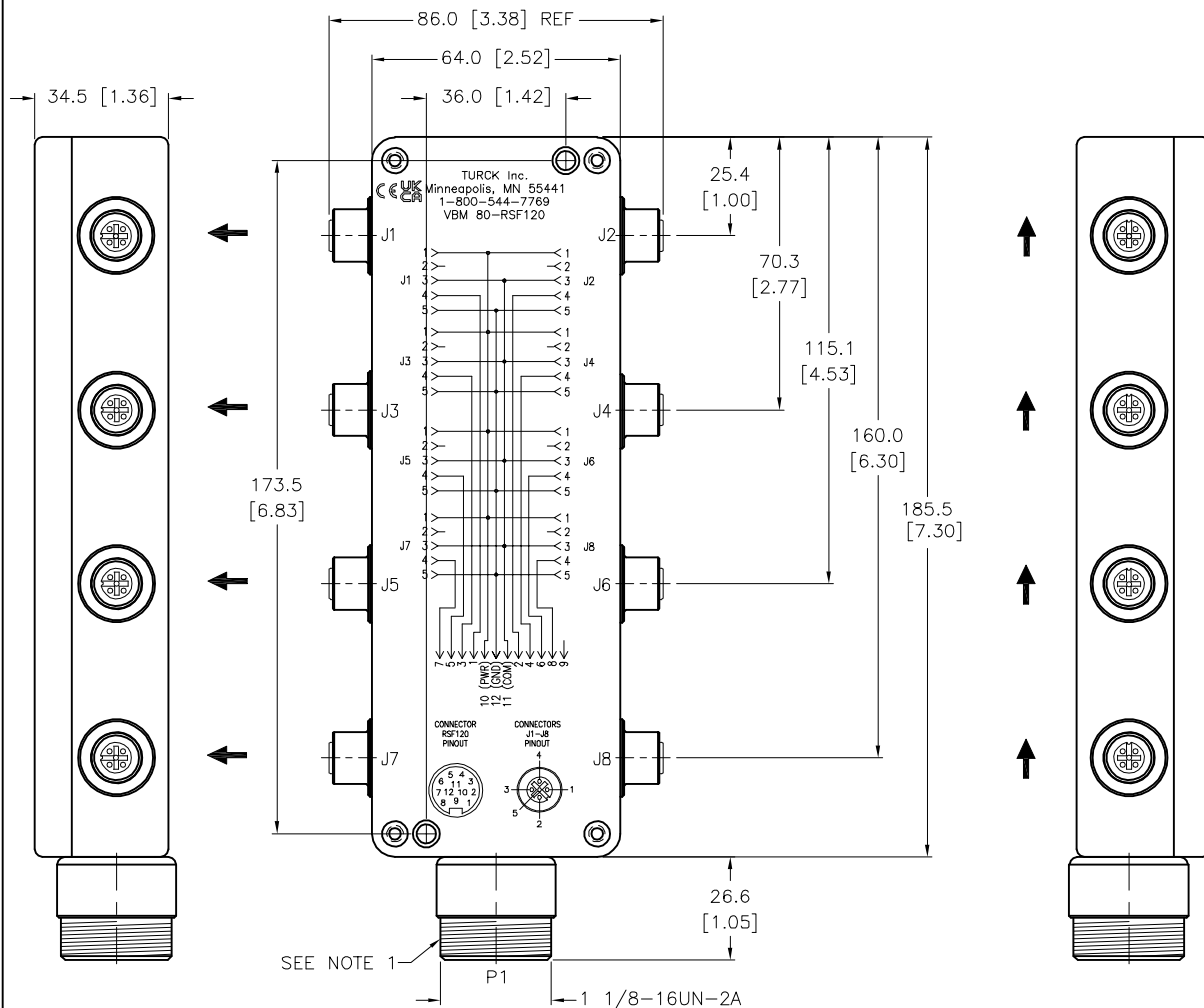

SPECIFICATIONS	
CABLE DATA	
MATING PLUG CABLE	RKM 126-*M
MATERIAL	
HOUSING MATERIAL	ALUMINUM ALLOY
CONNECTOR MATERIAL/PLATING	BRASS/NICKEL
CONTACT CARRIERS/COLOR	TPU/BLACK
CONTACT	BRASS/GOLD
ELECTRICAL DATA	
OPERATING VOLTAGE	10-48 VDC
OPERATING CURRENT	4.0 A per PORT, 8.0 A TOTAL
MECHANICAL DATA	
PROTECTION CLASS to DIN 40050	IP 67 - ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATING TEMPERATURE	-40°C to 90°C (-40°F to 194°F)

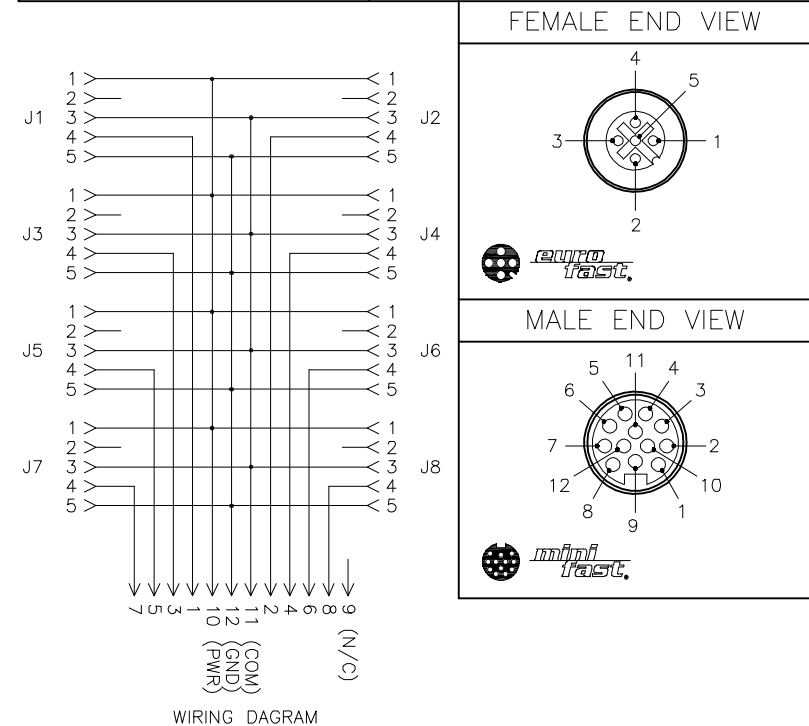


NOTES:

- USE MATING CORDSET RKM 126-*M (* = CABLE LENGTH IN METERS).
- CLEARANCE HOLE FOR M4 [#8] MOUNTING SCREWS (2 NOT INCLUDED).

↑ = KEY ORIENTATION

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us		
								
MATERIAL SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT	RWC	DATE	06/02/06	DESCRIPTION VBM 80-RSF120		
FINISH SEE SPECIFICATIONS		APVD		SCALE	1=2.0			
			UNIT OF MEASUREMENT MILLIMETER [INCH]				IDENTIFICATION NO. U0923-50	REV E
			DO NOT SCALE THIS DRAWING				FILE: U0923-50	SHEET 1 OF 1

E	ADD CE-UKCA MARK TO CLICHE	RDS	04/29/22	500000004984
REV	DESCRIPTION	BY	DATE	ECO NO.