

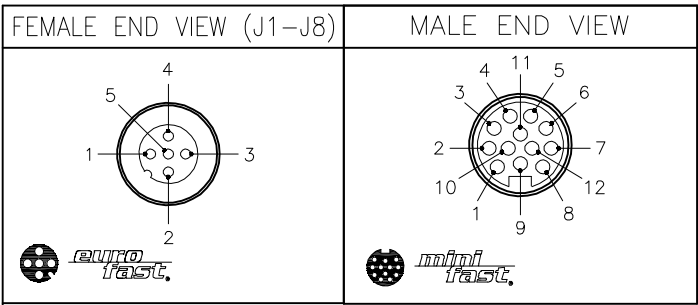
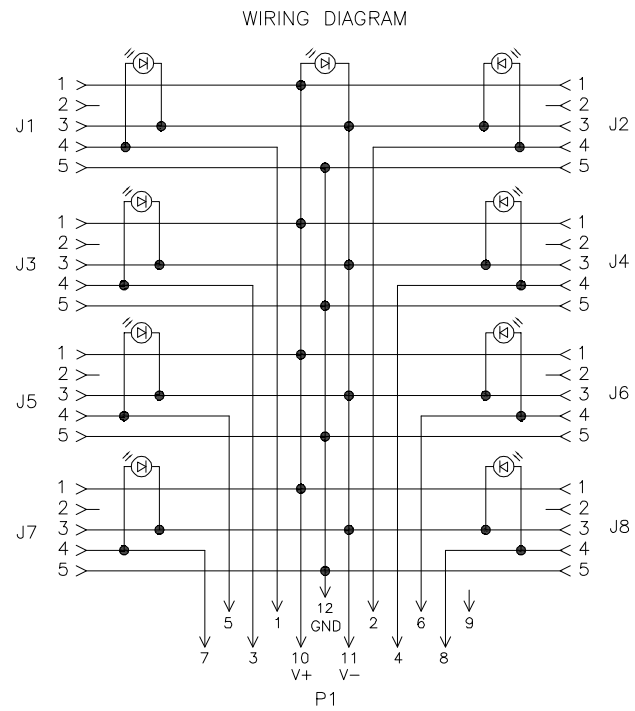


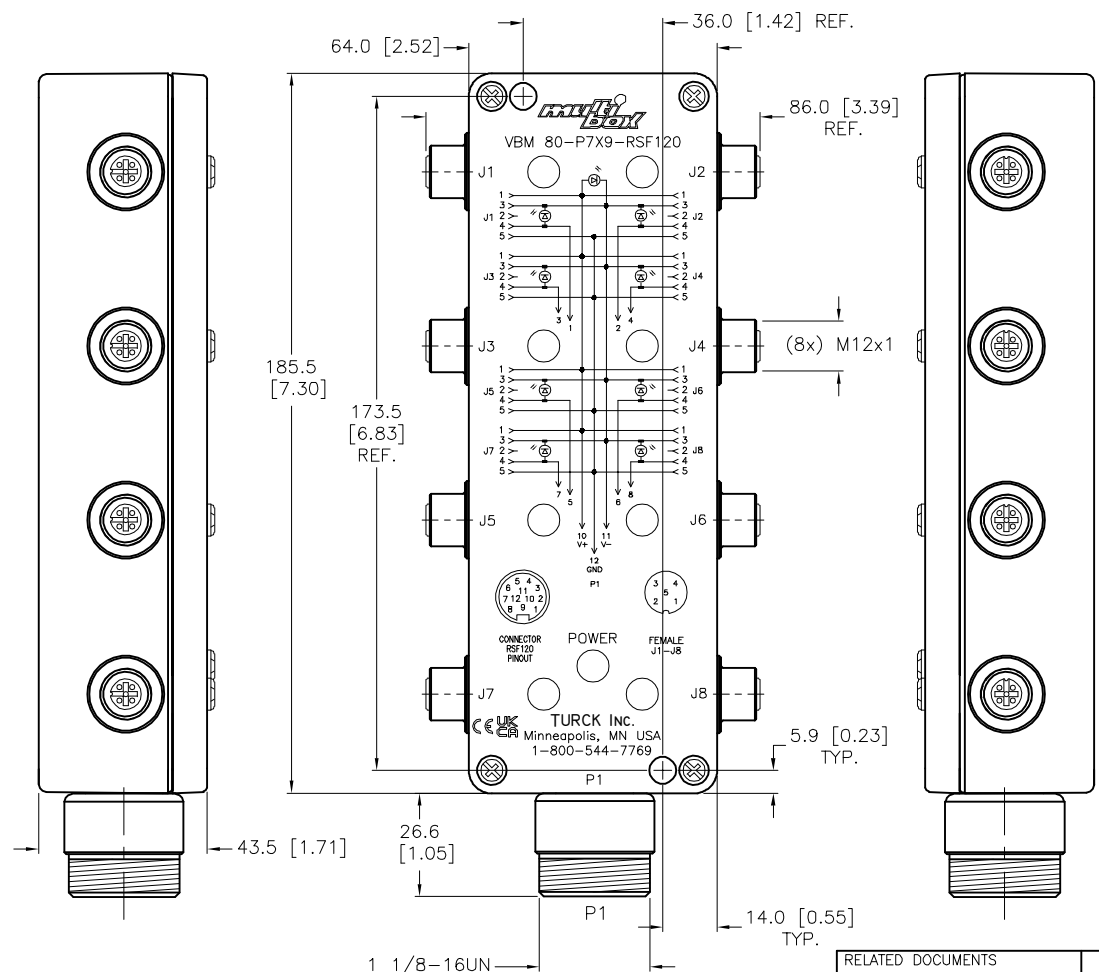

SPECIFICATIONS	
HOUSING MATERIAL	DIE-CAST ALUMINUM ALLOY
HOUSING FINISH/COLOR	POWDER COAT/BLACK
RECEPTACLE HOUSING MAT'L/PLATING	BRASS/NICKEL
CONTACT CARRIER MATERIAL	NYLON
CONTACT MATERIAL/PLATING	BRASS/GOLD
OPERATING VOLTAGE [V]	10-48 VDC
OPERATING CURRENT [A]	4.0 AMPS/CONNECTOR, 7.0 AMPS TOTAL
LED FUNCTION	FOR PNP SENSOR OUTPUT
PROTECTION CLASS to DIN 40050	IP 67 - ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATING TEMPERATURE	-40°C to +90°C (-40°F to +194°F)



SOURCE DRAWING - FOR REFERENCE ONLY

 CAP				1 1/8-16UN				RELATED DOCUMENTS 1. U0909-89 2. 3. 4.				3RD ANGLE PROJECTION 		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us			
				MATERIAL SEE SPECIFICATIONS				ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION		DRFT RDS		DATE 05/15/07		DESCRIPTION VBM 80-P7X9-RSF120					
FINISH SEE SPECIFICATIONS				APVD		SCALE 1=2.0													
										UNIT OF MEASUREMENT MILLIMETER [INCH]				IDENTIFICATION NO. U0923-51				REV D	
										DO NOT SCALE THIS DRAWING				FILE: U0923-51				SHEET 1 OF 1	
						D		ADD CE-UKCA MARK TO CLICHE				RDS 04/29/22		500000004984					
REV		DESCRIPTION				BY		DATE		ECO NO.									