



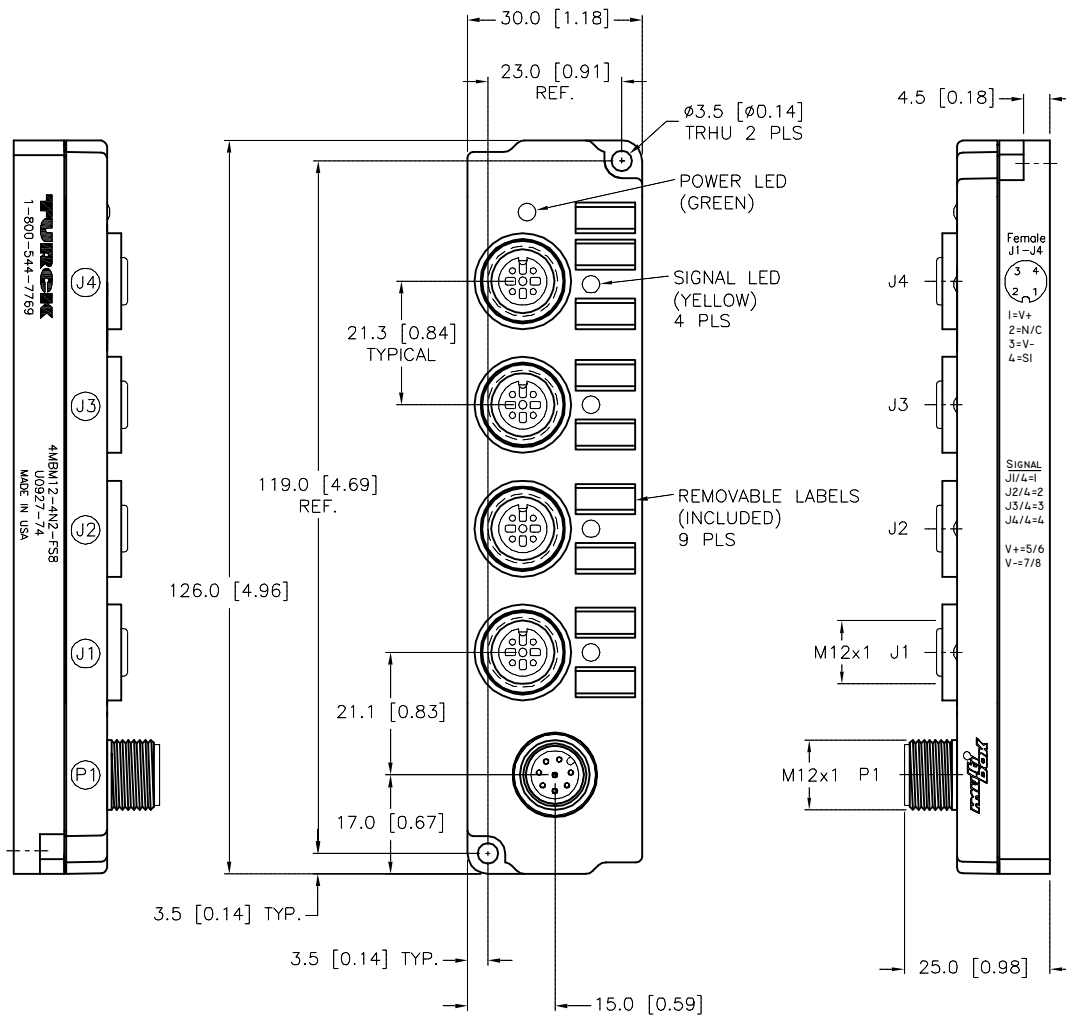

SPECIFICATIONS	
MATERIAL	
HOUSING/COLOR	NYLON/BLACK
RECEPTACLES/PLATING	BRASS/NICKEL
CONTACT CARRIERS/COLOR	NYLON/BLACK
CONTACTS/PLATING	BRASS/GOLD
SEALING RING	VITON O-RINGS
ELECTRICAL DATA	
OPERATING VOLTAGE [V]	10-48 VDC
OPERATING CURRENT [A]	4.0 AMPS PER PORT
TOTAL CURRENT [A]	2.0 AMPS USING SINGLE POWER PAIR 4.0 AMPS USING DUAL POWER PAIR
MECHANICAL DATA	
PROTECTION CLASS	IP 67 - ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATING TEMPERATURE	-30°C to +80°C (-25°F to +176°F)

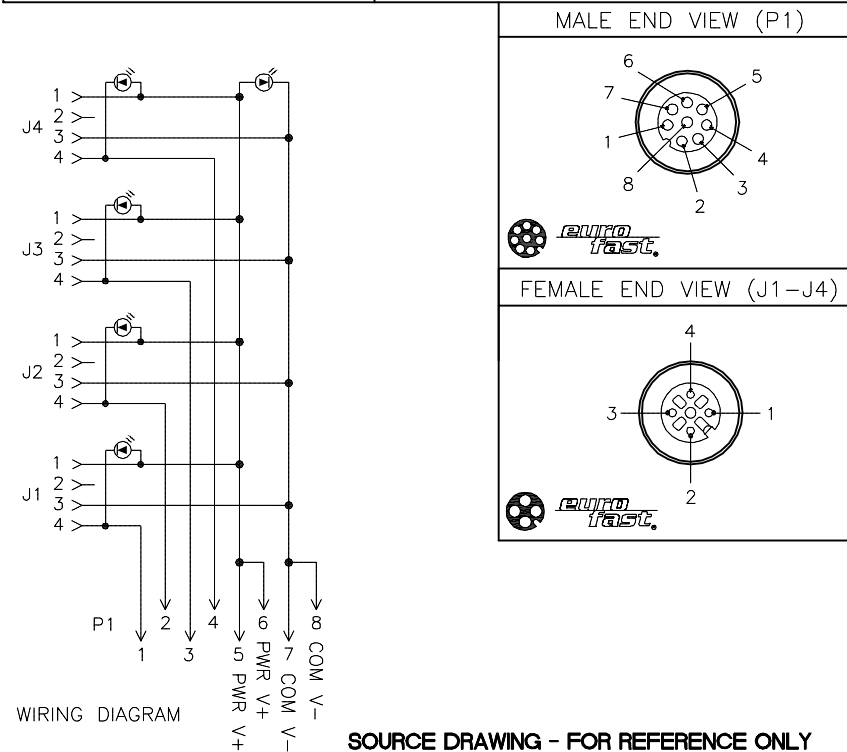

CLOSURE CAPS
(2 INCLUDED)

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED. TURCK INC <i>High Technology Sensors and Automation Controls</i>		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com					
1.											
2.				DRFT	RDS	DATE	12/09/05			DESCRIPTION 4MBM12-4N2-FS8	
3.				APVD		SCALE	1=1.3				
4.				UNIT OF MEASUREMENT					IDENTIFICATION NO.		REV
				MILLIMETER [INCH]					U0927-74		C
				DO NOT SCALE THIS DRAWING					FILE: U0927-74		SHEET 1 OF 1
MATERIAL				ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY							
SEE SPECIFICATIONS				CONTACT TURCK FOR MORE INFORMATION							
FINISH											
SEE SPECIFICATIONS											

C	UPDATED CLOSURE CAPS	TV	09/14/15	48811
REV	DESCRIPTION	BY	DATE	ECO NO.