
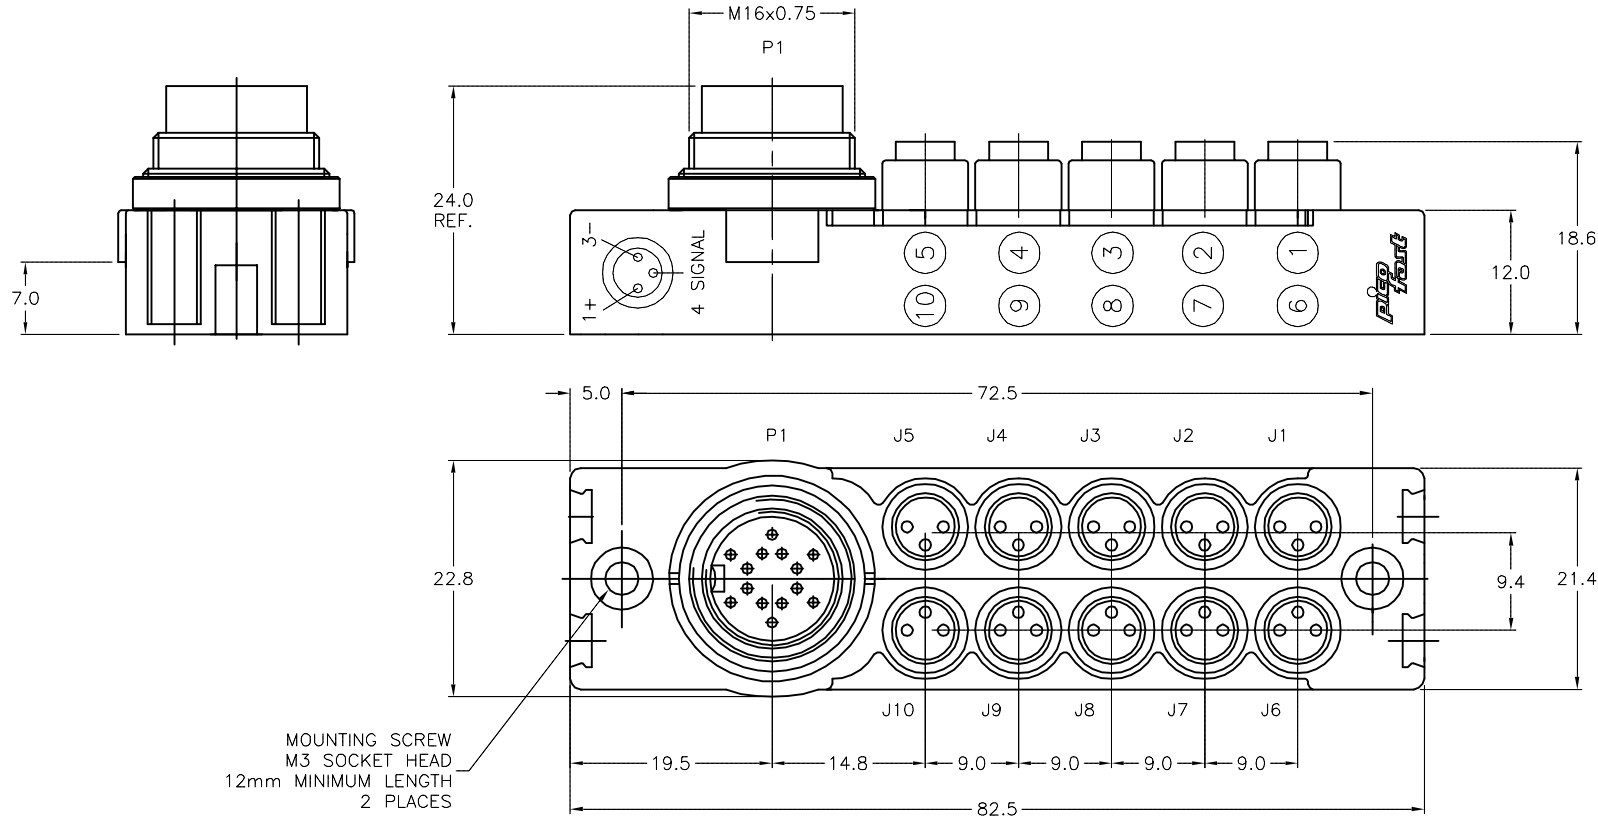


WIRING DIAGRAM	CONNECTOR (P1)	CONNECTORS (J1-J10)	SPECIFICATIONS	
	 	 	HOUSING MATERIAL	PA 6 NYLON
			HOUSING COLOR	BLACK
			RECEPTACLE HOUSING	ALUMINUM (P1), POLYURETHANE (J1-J10)
			CONTACT CARRIER MATERIAL/COLOR	PETP (P1), POLYURETHANE (J1-J10) / BLACK
			CONTACTS	GOLD-PLATED BRASS
			OPERATING VOLTAGE	48 V AC/DC
			OPERATING CURRENT	3.0 A PER PORT, 3.0 A TOTAL
			PROTECTION CLASS to DIN 40050	IP 67 - ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
			OPERATING TEMPERATURE	-40°C to 85°C (-40°F to 185°F)



SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. ESCHA: 64060000 2. 3. 4.					3RD ANGLE PROJECTION 		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us							
MATERIAL					ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT GC		DATE 02/02/99		DESCRIPTION VB 1003-BS14					
							APVD GC		SCALE 1=3/4							
FINISH					CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT MILLIMETERS				IDENTIFICATION NO. U0943-53		REV D			
D	UPDATE DESCRIPTION AND ID NUMBER				RDS	10/13/03	10581									
REV	DESCRIPTION				BY	DATE	ECO NO.		DO NOT SCALE THIS DRAWING				FILE: U0943-53		SHEET 1 OF 1	