



BOARD LAYOUT




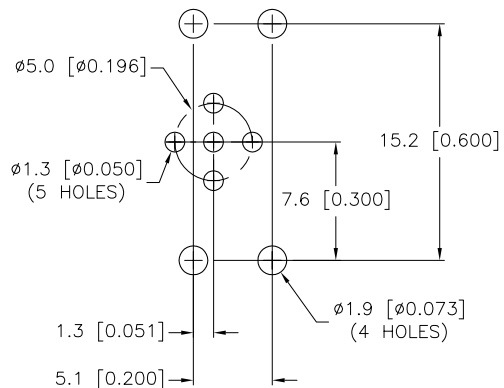


MALE END VIEW



SPECIFICATIONS


CONTACT CARRIER MATERIAL/COLOR	NYLON/BLACK
CONTACT MATERIAL/PLATING	BRASS/GOLD
HOUSING, LOCKNUT MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	4.0 A
RATED VOLTAGE [V]	250 V
NUMBER OF CONDUCTORS [AWG]	PRINTED CIRCUIT PINS
TEMPERATURE RATING	-40°C to +80°C (-40°F to +176°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68

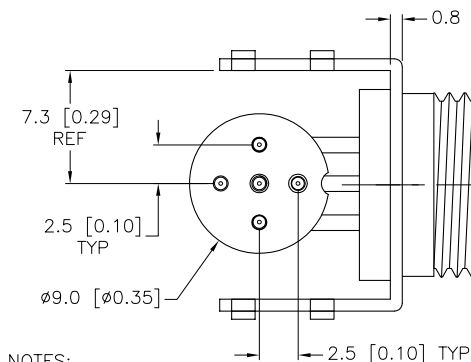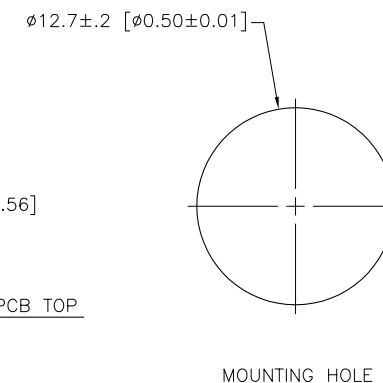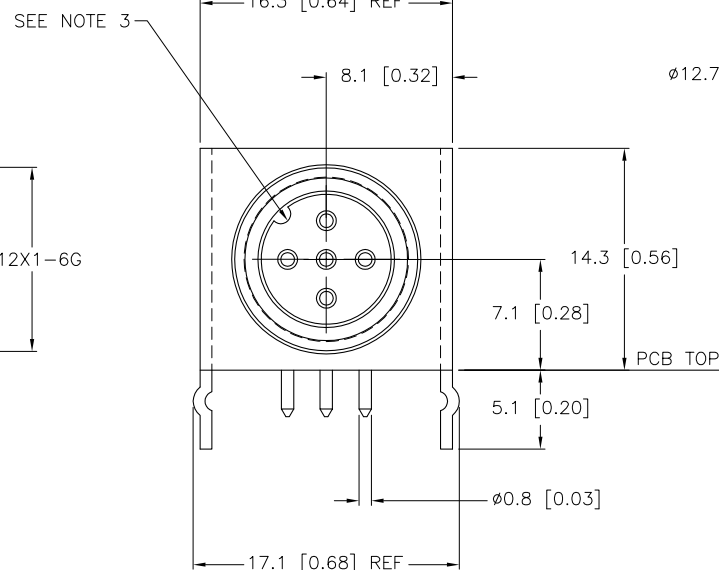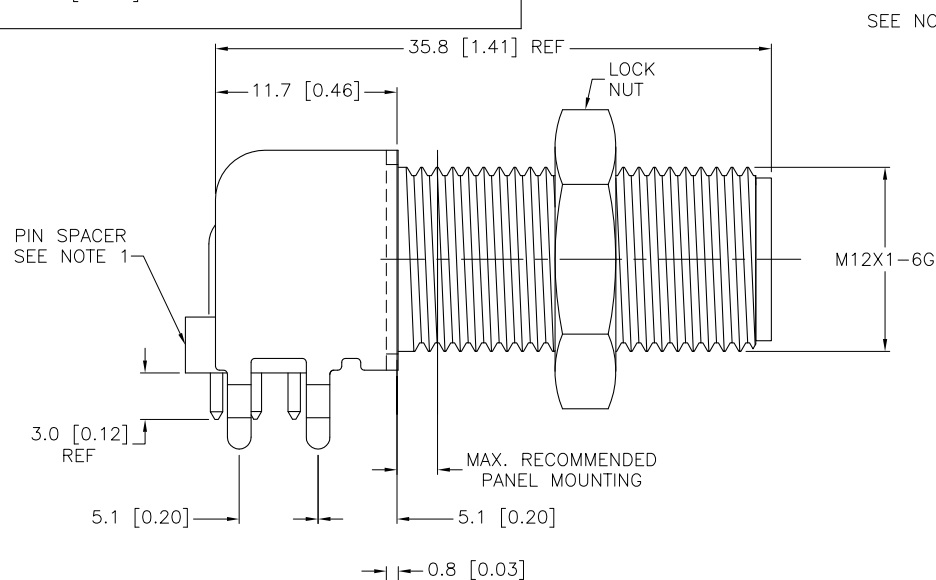

NOTES:

- DO NOT REMOVE PIN SPACER.
- UNIT SNAP-FITS INTO 0.062 TO 0.125 THICK PC BOARDS.
- "/CS10114" DESIGNATES KEYWAY ROTATED 180 DEGREES.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. INSERT SHEET 10240204 2. 3. 4.	3RD ANGLE PROJECTION 	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK INC <i>High Technology Sensors and Automation Controls</i> 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com		
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION	DRFT	DD	DATE	11/10/03	DESCRIPTION WFS 4.5-PCB/CS10114
FINISH		DSGN		SCALE	2=1.0	
		UNIT OF MEASUREMENT MILLIMETER [INCH] DO NOT SCALE THIS DRAWING				IDENTIFICATION NO. U0945-08
			FILE: U0945-08			

D	UPDATE SPECIFICATIONS	TR	11/22/06	16588
REV	DESCRIPTION	BY	DATE	ECO NO.